

|                  |                                                                                     |                                     |
|------------------|-------------------------------------------------------------------------------------|-------------------------------------|
| <b>FINISHES:</b> |  | ROOM FINISH SCHEDULE GENERAL NOTES: |
|------------------|-------------------------------------------------------------------------------------|-------------------------------------|

---

■

FB-1 4" RUBBER COVE BA

### **FLOOR BASE GENERAL NOTES:**

- 1. GENERAL CONTRACTOR TO PROVIDE AND INSTALL RUBBER BASE AFTER MILLWORK IS INSTALLED. ALL MILLWORK AND THE TRAINING PODIUM ARE TO RECEIVE RUBBER BASE.**
- 2. NO EXCEPTIONS. RUBBER BASE TO BE FROM ROLL STOCK IN MINIMUM 20'-0" LENGTHS AND FROM SAME DYE LOT. PRF-FORMED CORNERS ARE NOT PERMITTED.**
- 3. GENERAL CONTRACTOR TO PROVIDE AND INSTALL RUBBER BASE AT ALL WALLBOARD WALLS THROUGHOUT THE STORE UNLESS NOTED OTHERWISE.**
- 4. COMPOSITE BASE SHALL BE INSTALLED WITH SMOOTH SIDE OUT.**

WC-1 PANOLAM GRAY FRP

**WALL COVERING GENERAL NOTES:**

- 1. NATIONAL ACCOUNT MILLWORK VENDOR (REQUIRED)** HIRED BY GC MUST FURNISH AND INSTALL THE FRP SYSTEM. IT IS GC RESPONSIBILITY TO INCLUDE THEIR PRICE IN HIS BID.
- 2. THERE WILL BE NO EXCEPTIONS.** THE AREAS THAT RECEIVE THE FRP WALL PANELS MUST BE PROPERLY PREPARED. IF THE WALL ARE NOT GC PROPERLY PREPARED, AND PROPERLY LIGNED, ANY DELAYS IN INSTALLATION WILL REQUIRE THE GC TO PAY THE NATIONAL ACCOUNT MILLWORK VENDOR FOR DELAYS. THE CONTRACTOR MUST HAVE THE INSTALL TAKES TO COMPLETE AS WELL AS THE COST TO PREPARE THE AREAS CORRECTLY. THE COST FOR DELAYS WILL GO DIRECTLY TO THE NATIONAL ACCOUNT MILLWORK VENDOR.
- 3. GENERAL CONTRACTOR IS RESPONSIBLE FOR PROVIDING MATERIAL TAKE-OFFS FOR ORDERING OF THE FRP WALL PANELS, TRIM, AND BASE. NATIONAL ACCOUNT MILLWORK VENDOR WILL PROVIDE MATERIALS AND INSTALLATION.**
- 4. TYPICAL LEAD TIME FOR FRP WALL PANEL MATERIALS IS TO BE OBTAINED BETWEEN THE GC AND THE NATIONAL ACCOUNT MILLWORK VENDOR.**

CT-1 **DALTILE EDGEWOOD**

**TILE TRANSITION GENERAL NOTES:**

1. TYPICAL TOP EDGE OF CERAMIC TILE TRANSITION TO WALL (HORIZONTAL): GROUT EDGE TO WALL.
2. TYPICAL BOTTOM OF CERAMIC TILE TRANSITION TO FLOOR: GROUT EDGE TO FLOOR.
3. TYPICAL OUTSIDE CORNER TRANSITION: SEAL CORNER GROUT TO TILE PER DETAIL 10/A12.0 AND 11/A12.0.
4. TYPICAL END OF RUN TRANSITION TO WALL (VERTICAL): GROUT EDGE TO WALL.

WB-1 5/8" GYPSUM WALL

**WALLBOARD GENERAL NOTES:**

- 1. ALL WALLBOARD MUST BE INSTALLED HORIZONTALLY.**
- 2. ALL WALLS WITHIN 2'-0" OF A WATER SOURCE MUST RECEIVE WB-2 MOISTURE RESISTANT WALLBOARD TO 4'-0" AFF UNLESS THE WALL IS SCHEDULED TO RECEIVE WB-3 WATER RESISTANT WALLBOARD.**

PPG PAINT COLOR

|     |                                       |                                                               |
|-----|---------------------------------------|---------------------------------------------------------------|
| P-1 | <b>DOVER GRAY</b><br>#PPG1001-5       | 1 COAT PPG DULUX SPRAYMASTER<br>1100 DRY-FALL MATTE FINISH    |
| P-2 | <b>COMMERCIAL WHITE</b><br>#PPG1025-1 | 2 COATS PPG DULUX LIFEMASTER 0 V<br>59311A ACRYLIC EGGSHELL   |
| P-3 | <b>DOVER GRAY</b><br>#PPG1001-5       | 2 COATS PPG DULUX LIFEMASTER 0 V<br>59311A ACRYLIC EGGSHELL   |
| P-4 | <b>DARTMOOR MIST</b><br>#PPG1154-3    | 2 COATS PPG DULUX LIFEMASTER 0 V<br>59311A ACRYLIC EGGSHELL   |
| P-5 | <b>DOVER GRAY</b><br>#PPG1001-5       | 2 COATS PPG DULUX LIFEMASTER 0 V<br>59311A ACRYLIC SEMI-GLOSS |
| P-6 | <b>COMMERCIAL WHITE</b><br>#PPG1025-1 | 2 COATS PPG DULUX LIFEMASTER 0 V<br>59311A ACRYLIC SEMI-GLOSS |
| P-7 | <b>SAFETY YELLOW</b><br>#PPG7306      | 2 COATS PPG SPEEDHIDE 0 V-655<br>SEMI-GLOSS ENAMEL FINISH     |
| P-8 | <b>MATCH EXTERIOR BUILDING COLOUR</b> |                                                               |

## MATERIALS


|                                                                                             |                                                      |
|---------------------------------------------------------------------------------------------|------------------------------------------------------|
| EXTERIOR/INTERIOR<br>GALVANIZED METAL                                                       | 1 COAT PITT-TECH<br>DIRECT-TO-METAL PRIMER #90-712   |
| INTERIOR GYPSUM BOARD                                                                       | 1 COAT PPG<br>SPEEDHIDE PRIMER SEALER #6-2           |
| WOOD                                                                                        | 1 COAT PPG<br>SEAL GRIP PRIMER SEALER #17-921X1      |
| INTERIOR FERROUS METAL<br>(UNDERSIDE OF ROOF DECK,<br>DUCTWORK, PIPING,<br>STRUCTURE, ETC.) | 1 COAT PITT-TECH<br>DIRECT-TO-METAL PRIMER #90-712   |
| CMU (INTERIOR FACE OF<br>EXTERIOR CMU)                                                      | 2 COATS PPG<br>SPEEDHIDE ACRYLIC BLOCK FILLER #6-15X |

1. ALL PAINT TO BE PPG PAINTS. G  
APPROPRIATE MANUFACTURER

2. CONTRACTOR TO SUBMIT PAINT DRAWDOWNS TO PETSMART CM FOR APPROVAL.
3. PROVIDE PRIMER AS SCHEDULED.
4. SMOOTH FINISH ON ALL PAINTED SURFACES.
5. PAINT CONDUIT DROPS P-2 "COMMERCIAL WHITE" TO MATCH COLUMN.
6. NUMBER OF COATS SHOWN IS MINIMUM REQUIRED. PAINT AS NECESSARY TO ACHIEVE FULL COVERAGE.
7. DO NOT PAINT MECHANICAL GRILLES (FACTORY FINISHED ONLY), UNLESS NOTED OTHERWISE.
8. PAINT ON CMU WALLS OR CONCRETE TILT PANELS TO BE SMOOTH FINISH (WHERE OCCURS).
9. GENERAL CONTRACTOR / PAINT SUB/CONTRACTOR TO PREPARE AND PAINT ROOF DECK BASED ON NEW / EXISTING DECKING INSTALLED.
10. PAINT BEHIND ALL MILLWORK.
11. SIKAFLEX 1A SEALANT TO BE USED AT ALL ROOMS WITH WET CONDITIONS UNLESS NOTED OTHERWISE.

SEE KEY PLAN (DETAIL 1/A7.0) FOR WALL NUMBERS AND PAINT COLORS.

1. SEE KEY PLAN (DETAIL 1/A7.0) FOR WALL NUMBERS AND PAINT COLORS.
2. REFERENCE ALL REMARKS IN THE ROOM FINISH SCHEDULE.
3. REFERENCE INTERIOR ELEVATIONS FOR ADDITIONAL INFORMATION.
4. SEE SHEET A3.0 AND A3.1 FOR CEILING MATERIALS AND HEIGHTS.
5. SEE SHEET A2.0 FOR EXTENT OF FLOOR FINISHES.

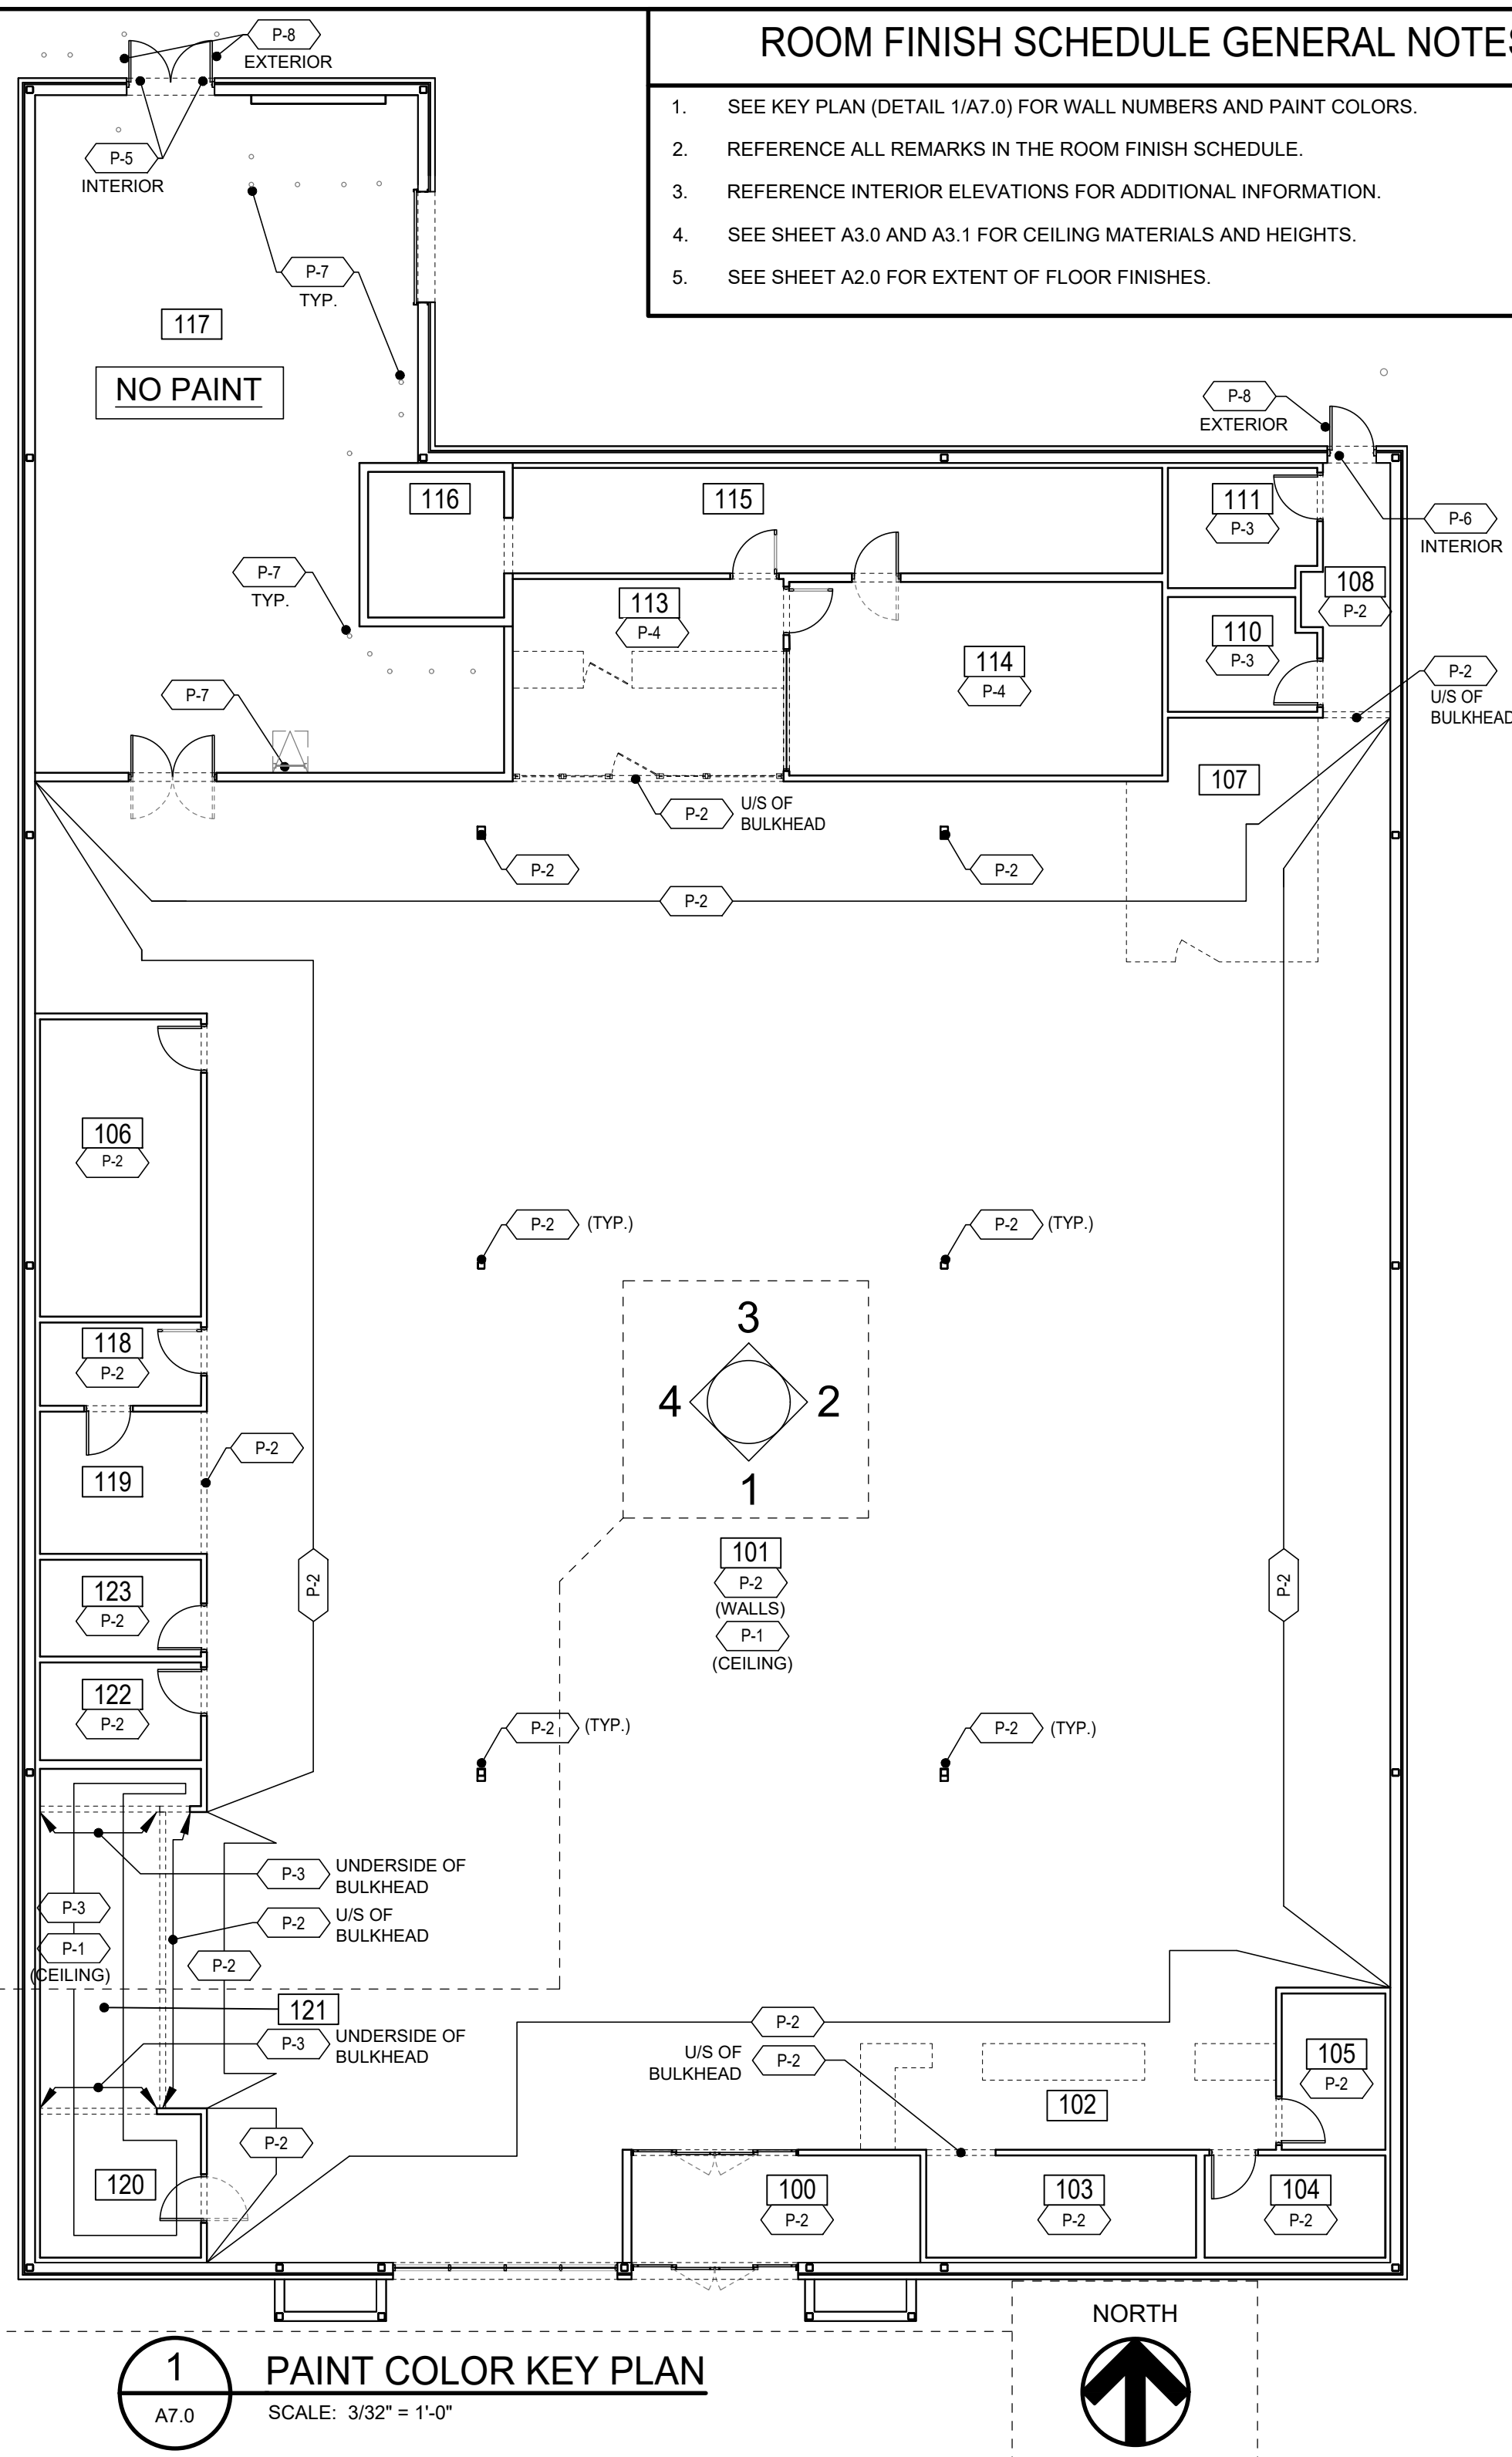

SIKAFLEX 1A SEALANT FOR ALL DEFINED "WET AREAS" )

| <u>COLOR</u>   | <u>LOCATIONS</u>                                                                                                 |
|----------------|------------------------------------------------------------------------------------------------------------------|
| ALUMINUM GREY  | AT ALL CLEAR ANODIZED ALUMINUM WINDOW AND DOOR FRAMING                                                           |
| LIMESTONE      | AT LOCATIONS WHERE SEALANT IS SPECIFIED AT CERAMIC TILE TRANSITIONS INCLUDING CERAMIC WALL TILE TO FLOOR         |
| LIMESTONE      | AT NATURALLY COLORED CONCRETE FLOORS & CURBS.                                                                    |
| LIMESTONE      | AT COMPOSITE BASE (TANGENT COLOR GREY) LOCATIONS, AND WHERE FRP PANEL AND COMPOSITE BASE MEET.                   |
| STANDARD COLOR | ALL OTHER LOCATIONS SHALL RECEIVE A STANDARD SIKKA - SIKAFLEX 1A COLOR NEAREST TO COLOR OF THE ADJACENT SURFACE. |

[illegible]