

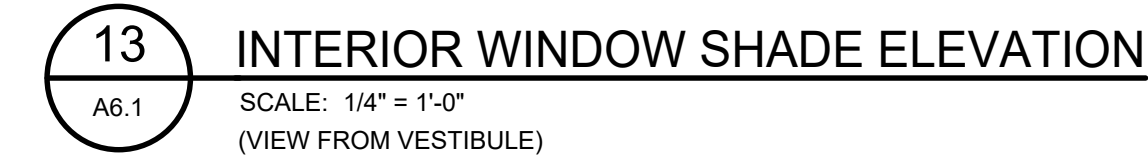
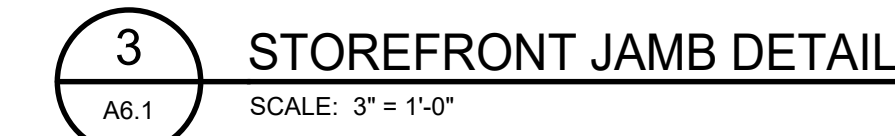
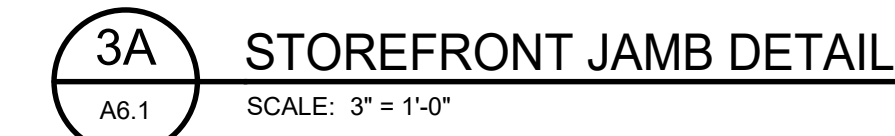
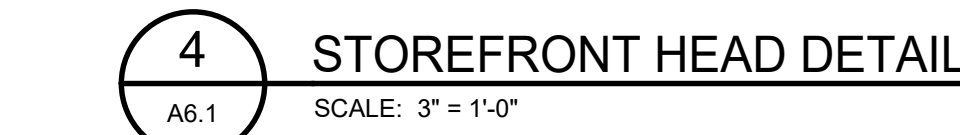
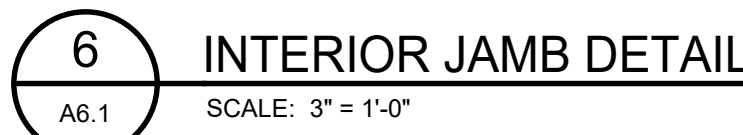
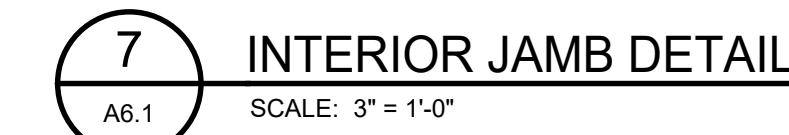


WINDOW SCHEDULE:										
MARK	WINDOW SIZE		ROUGH OPENING		WINDOW TYPE	DETAIL			FINISH	REMARKS
	WIDTH	HEIGHT	WIDTH	HEIGHT		HEAD	JAMB	SILL		
G1	8' - 9"	3' - 1½"	8' - 9 1/2"	3' - 2"	ALUM./GLASS	10/A6.1	10/A6.1 SIM.	10/A6.1	CLEAR ANODIZED	- INT. ALUMINUM WINDOW FRAMES BY NATIONAL ACCOUNT VENDOR.
GLASS TYPES:					STOREFRONT GENERAL NOTES:					
TYPE	DESCRIPTION									
1	1" LOW-E, PPG - SOLARGRAY + SOLARBAN (60) C (CLEAR) OR APPROVED EQUAL				1. ALL STORE FRONT DIMENSIONS SHOWN IN ELEVATION ARE ACTUAL WINDOW FRAME SIZES. BOTH THE ROUGH OPENING & WINDOW FRAME SIZES ARE SHOWN IN WINDOW SCHEDULE.			5. THE EXTERIOR STOREFRONT SYSTEM DESIGN IS BASED ON VISTAWALL FG-3000 SYSTEM (2 x 4 1/2" FRAME).		
2	1" LOW-E, PPG - SOLARGRAY + SOLARBAN (60) C (CLEAR) OR APPROVED EQUAL ABOVE HORIZONTAL MULLION @ TOP OF DOOR				2. REFER TO STOREFRONT SPECIFICATIONS			6. FIELD VERIFY ACTUAL OPENING PRIOR TO FABRICATION.		
3	1/4" CLEAR TEMPERED GLASS UP TO 60 INCHES ABOVE FINISHED FLOOR				3. ALL EXTERIOR EXPOSED ALUMINUM SURFACES TO BE CLEAR ANODIZED FINISH			7. ALL GLAZING WITHIN 24" OF A DOOR AND / OR LESS THAN 60" ABOVE THE WALKING SURFACE SHALL BE SAFETY GLAZING.		
					4. ALL INTERIOR EXPOSED ALUMINUM SURFACES TO BE CLEAR ANODIZED FINISH					

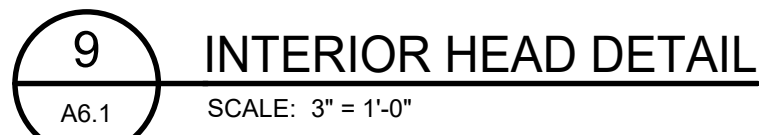

1.1 HEADER AT CEILING
SCALE: 1-1/2" = 1'-0"

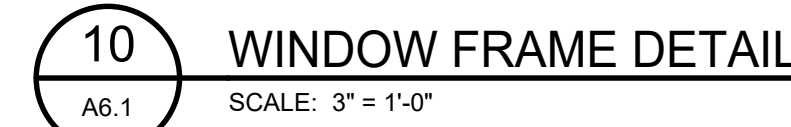

A6.1