
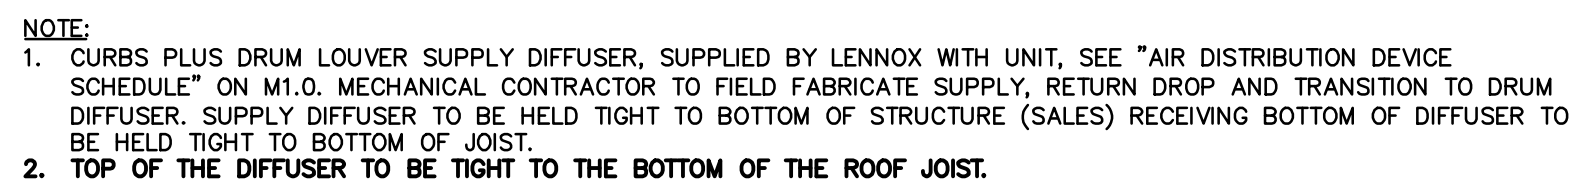


HVAC SYMBOLS LEGEND		
ITEM	ABBR.	DESCRIPTION
	-	RECTANGULAR DUCT
	-	ROUND DUCT
	-	45° TAP – USE AT BRANCH DUCTS ONLY
	-	CURVED (LONG SWEEP) DUCT ELBOW – MINIMUM RADIUS R=1.5 x WIDTH
	-	90° RECTANGULAR DUCT ELBOW WITH SINGLE RADIUS TURNING VANES
	FD	FIRE DAMPER – COMBO FIRE / SMOKE DAMPER
	BD	BALANCING DAMPER (USE O.B.D. UNLESS NOTED OTHERWISE)
	-	SPIN-IN DUCT TAKE-OFF W/ DAMPER
	BDD	BACKDRAFT DAMPER
	SA	SUPPLY AIR DUCT
	EXH	EXHAUST AIR DUCT
	RA	RETURN AIR DUCT
	TSTAT	THERMOSTAT
	RTS	REMOTE TEMPERATURE SENSOR
	HS	REMOTE HUMIDITY/TEMPERATURE SENSOR
	ES	NEXREV EMS TEMPERATURE SENSOR
	-	OPEN-ENDED DUCT
	-	1-WAY THROW DIFFUSER
	-	2-WAY THROW DIFFUSER
	-	2-WAY THROW DIFFUSER
	-	3-WAY THROW DIFFUSER
	-	4-WAY THROW DIFFUSER
	-	RETURN DIFFUSER
	-	EXHAUST DIFFUSER
	-	DIFFUSER IDENTIFICATION A=STYLE, B=AIRFLOW cfm, C=SIZE inches
	-	MECHANICAL/PLUMBING EQUIPMENT DESIGNATION MARK (DESIGNATION FOR SPECIFICATION OR MARK FOR SCHEDULE ON DRAWING)
	-	SPOT ELEVATION, MEASURED FROM BOTTOM OF DUCT



THIS DRAWING IS NOT TO BE SCALED.

SHEET NUMBER:

M2.0