

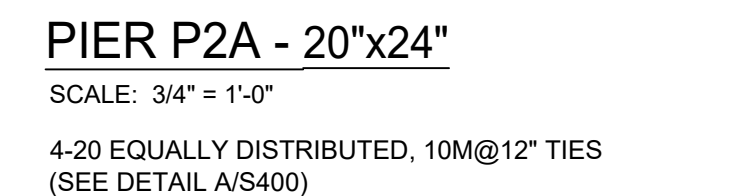
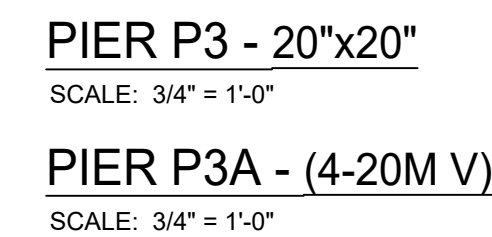
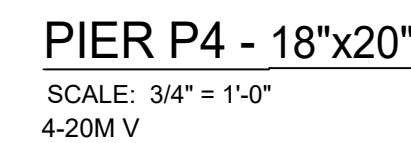


SPREAD FOOTING SCHEDULE										
MARK	F1	F2	F3	F4	F5	F6				
DATA										
SIZE	6'-6"x 6'-6"	6'-0"x 6'-0"	6'-6"x 6'-6"	4'-0"x 4'-0"	3'-6"x 3'-6"	SEE PLAN				
DEPTH (MIN.)	1'-4"	1'-4"	1'-4"	1'-2"	1'-2"	1'-4"				
REINFORCING (B.E.W.)	7-15M	7-15M	8-15M T&B E.W.	5-15M	4-15M	15M@10"				
LOAD IN KIPS (WORKING)	114	97	114	43	33	120				
REMARKS	1. BEARING CAPACITY 3000 P.S.F. (150 kPa) 2. PROVIDE DOWELS TO MATCH PIER VERTICALS.									

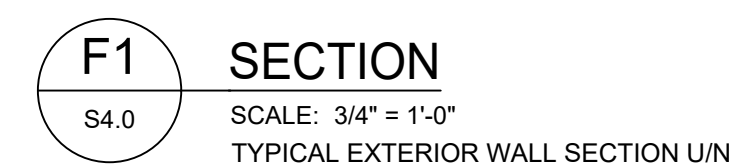

(ALTERNATE 24"Ø)

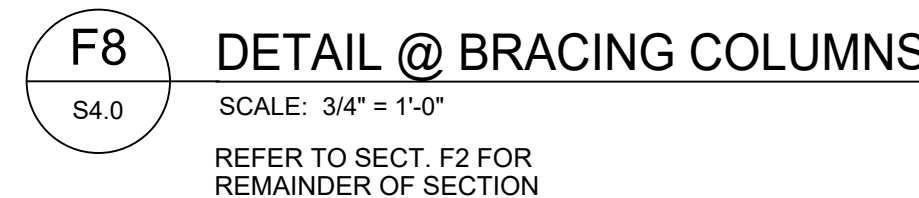

S4.0