


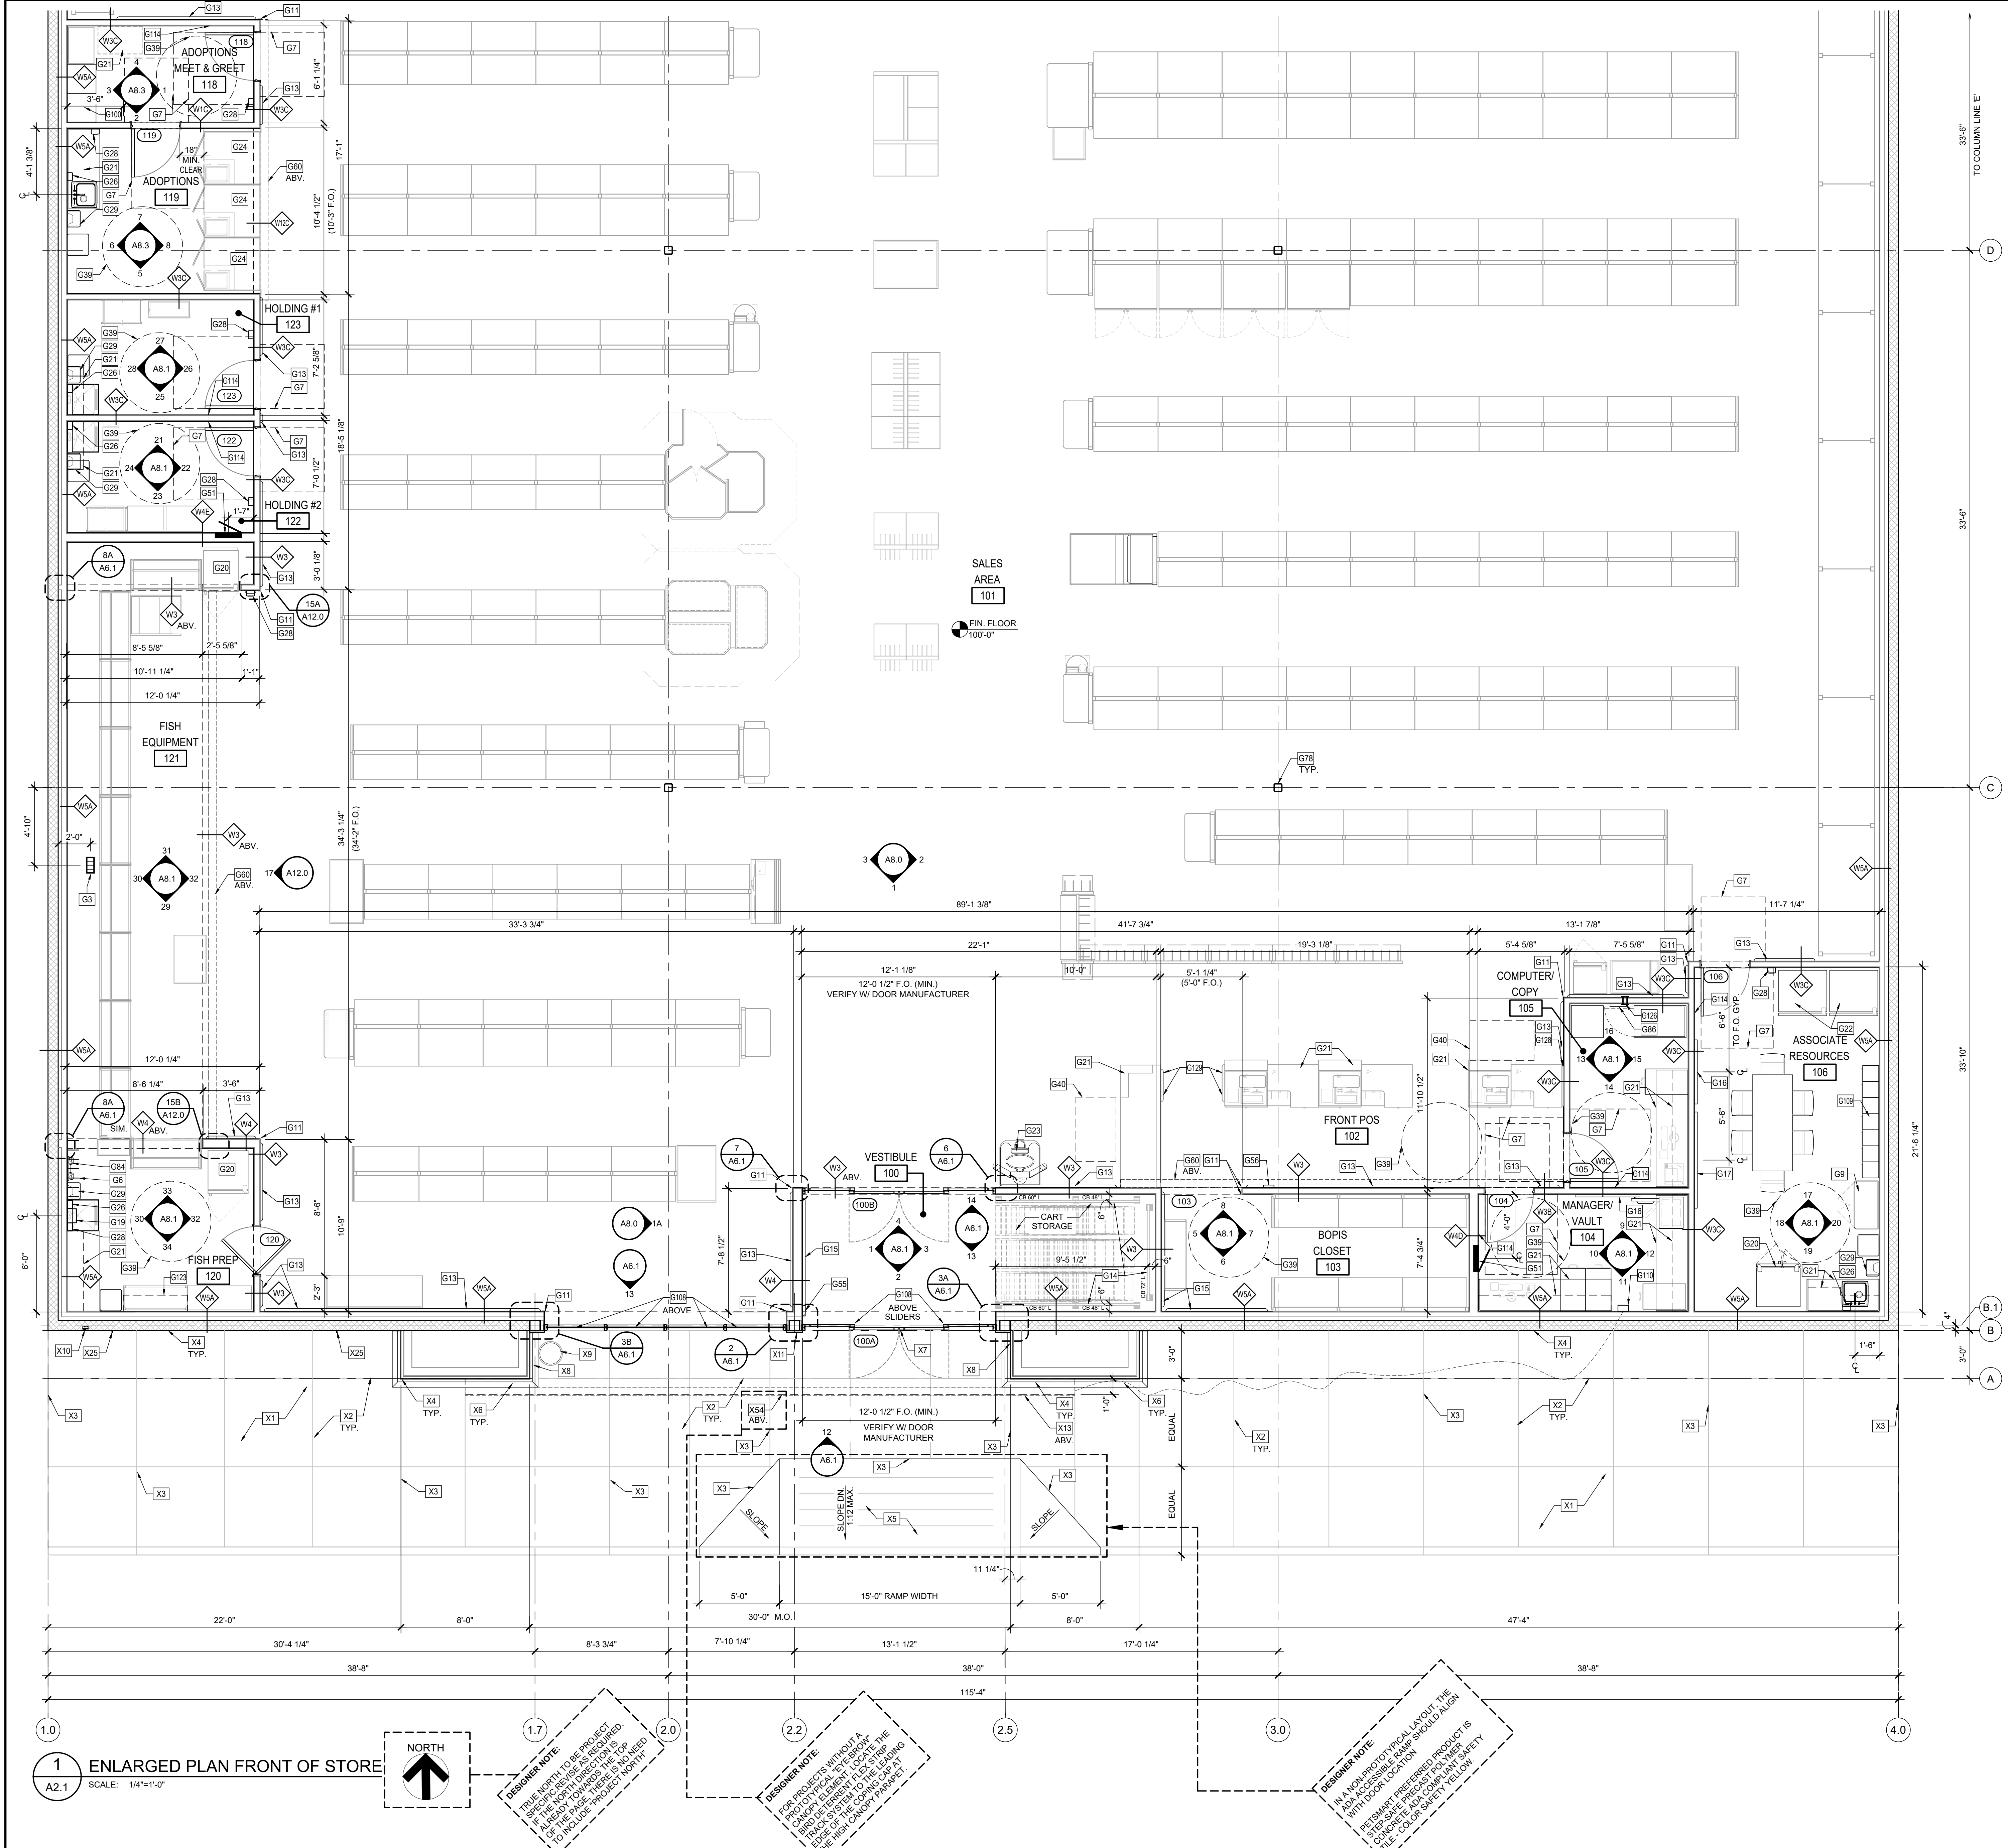

- GENERAL NOTES:**
- SEE SHEET A0.1 FOR ARCHITECTURAL KEY NOTES.
 - NO VISIBLE FLOOR CUTS ACCEPTABLE AT ANY LOCATIONS. UNLESS APPROVED BY PETSMART CONSTRUCTION MANAGER.
 - ALL INTERIOR PARTITION DIMENSIONS ARE TO FACE OF STUD OR INTERIOR FACE OF EXTERIOR CMU/CNC. WALL UNLESS NOTED OTHERWISE.
 - ALL WALLS BEHIND MILLWORK SHALL HAVE FINAL FINISH PRIOR TO INSTALLATION. ALL FLOORING FINISH MATERIAL SHALL BE INSTALLED PRIOR TO MILLWORK INSTALLATION.
 - SEALANTS TO BE SAME COLOR AS ADJACENT SURFACE UNLESS NOTED OTHERWISE.
 - ASSUMED FINISH FLOOR ELEVATION WITH THE ARCHITECTURAL DRAWINGS IS SHOWN AS 100'-0".
 - FOR ALL DOORS REQUIRING WALL MOUNTED DOOR STOPS, PROVIDE PLYWOOD BLOCKING PER BLOCKING SCHEDULE.
 - SEALANT IN ALL WET AREAS TO BE SIKAFLEX 1A POLYURETHANE SEALANT (COLOR TO MATCH ADJACENT SURFACES)
 - PROVIDE RODENT CONTROL MESH SECURED WITH EXPANDING FOAM AROUND ALL PENETRATIONS. INSTALL IN A WORKMANLIKE MANNER. SEE SPECS.
 - FOR LOCATION OF DOOR JAMBS NOT SHOWN ON PLAN, SEE DETAIL 10/A6.0.
 - SEE SHEET A9.0 FOR WALL TYPES.
 - CONTRACTOR TO INSTALL PAPER TOWEL DISPENSER AND HAND SANITIZER IN ADOPTION CENTER ROOM W/ KENNELS. ON REPTILE HABITAT ON SIDE FACING AWAY FROM FRONT DOOR. ON DOOR OF BIRD HABITAT. AND ALL PET CLEANUP STATIONS AS DIRECTED BY PETSMART CONSTRUCTION MANAGER.
 - ALL MILLWORK IN THE SALON AREA IS SUPPLIED AND INSTALLED AS PART OF THE GENERAL CONTRACT BY THE G.C. THROUGH REQUIRED VENDOR PROGRAM WITH MILLWORK VENDOR.
 - CONTRACTOR IS TO PROVIDE ALL REQUESTED SITE MEASURED DIMENSIONS FOR DECOR CONTRACTOR.
 - SEE SHEET A6.0 FOR DOOR SCHEDULE AND SHEET A6.1 FOR STOREFRONT AND WINDOW ELEVATIONS.

WALL PARTITION INSULATION LEGEND:

WXY	W= WALL TYPE TAG. (SEE SHEET A6.0 FOR WALL TYPES) X= NUMBER IDENTIFYING WHICH WALL TYPE Y= LETTER IDENTIFYING WHICH TYPE & EXTENT OF INSULATION
LABEL	INSULATION DESCRIPTION
A	2-1/2" RIGID INSULATION FULL HEIGHT
B	UNFACED 3-1/2" BATT. INSULATION FULL HEIGHT
C	UNFACED 3-1/2" BATT. INSULATION TO 6" ABOVE FINISHED CEILING
D	UNFACED 6" BATT. INSULATION FULL HEIGHT
E	UNFACED 6" BATT. INSULATION TO 6" ABOVE FINISHED CEILING

19601 North 27th Avenue
Phoenix, Arizona 85027 - (623) 580-6100

16K 2025 US INSTRUCTION SET

FEBRUARY 12, 2025

ENLARGED FLOOR PLANS

A2.1