


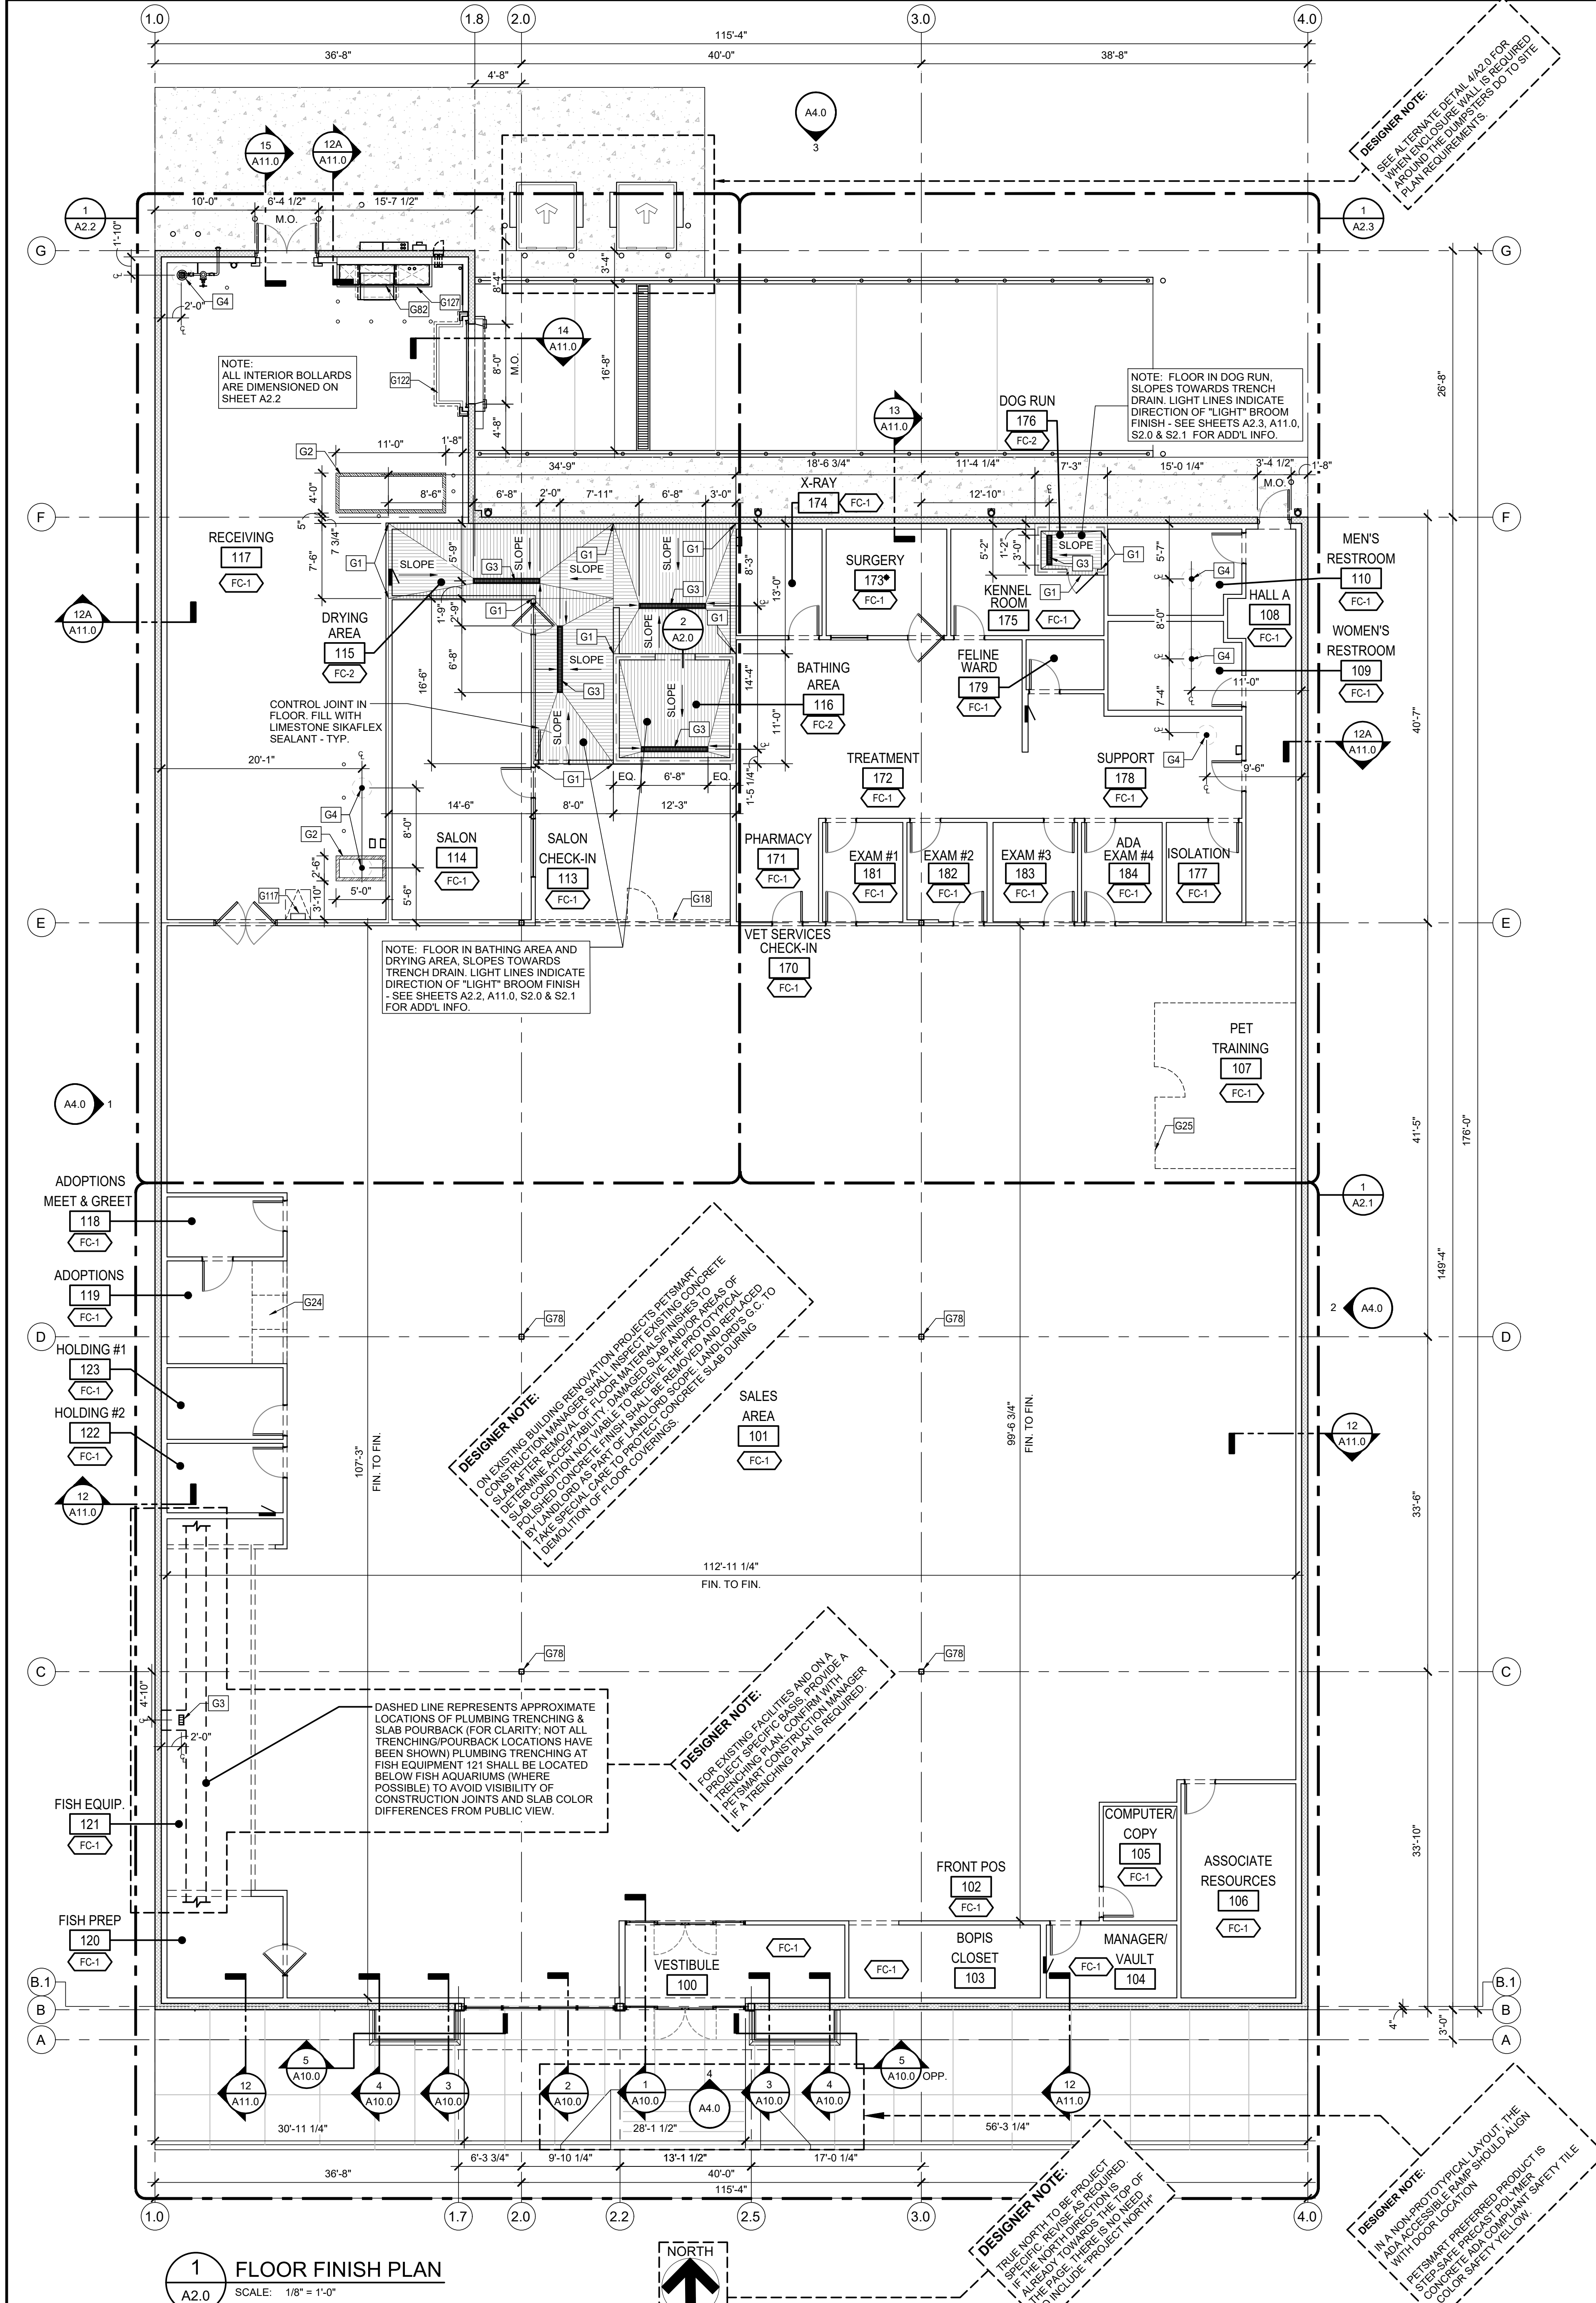

LEGEND:

- SLOPED CONCRETE SLAB.
- POLISHED OR EXPOSED CONCRETE FLOOR FINISH.
- EXISTING EXTERIOR WALLS BY BASE BUILDING.
- INDICATES DIRECTION OF SLOPE DOWN.

FLOOR FINISH LEGEND:

NOTE: SEE SHEET F2.0 FOR LIST OF REQUIRED POLISHED CONCRETE VENDORS.

- (FC-1) POLISHED CONCRETE - AMERIPOLISH SYSTEM (NO COLOR & POLISH TO #800 GRIT). FILL/SEAL ALL CONSTRUCTION AND CONTROL JOINTS (COLOR TO MATCH). SEE SPECIFICATIONS
- (FC-2) EXPOSED CONCRETE WITH (LIGHT) SOFT BROOM FINISH. HARD TROWELED SMOOTH AND FINISHED WITH A VERY SOFT HORSE HAIR BROOM (ERROR ON THE SIDE OF SMOOTH) PETSMAST CONSTRUCTION MANAGER TO HAVE FINAL APPROVAL OF FINISH. LIGHTLY STONE AS NEEDED TO MINIMIZE ROUGHNESS. APPLY (2) COATS OF "AQUAPEL PLUS" SEALER AS MANUFACTURED BY L & M CONSTRUCTION CHEMICAL. DIRECTION OF SLOPE AS INDICATED.

GENERAL NOTES:

- SEE SHEET A0.1 FOR ARCHITECTURAL KEY NOTES.
- NO VISIBLE FLOOR CUTS ACCEPTABLE AT ANY LOCATIONS OTHER THAN THOSE INDICATED IN THE DRAWINGS, UNLESS APPROVED BY PETSMAST CONSTRUCTION MANAGER.
- ALL FLOOR FINISH DIMENSIONS ON THIS SHEET ARE TO FINISH SURFACE UNLESS NOTED OTHERWISE.
- ALL FLOORING FINISH MATERIAL SHALL BE INSTALLED PRIOR TO MILLWORK INSTALLATION.
- ASSUMED FINISH FLOOR ELEVATION WITHIN THE ARCHITECTURAL DRAWINGS IS AT 100'-0".
- G.C. TO CLEAN NON-POLISHED SLABS (I.T. BROOM AREAS) WITH A HARD BRISTLE BRUSH. DO NOT DAMAGE THE FINISH.
- G.C. TO SCHEDULE A "PRE-SLAB" MEETING WITH PETSMAST CONSTRUCTION MANAGER AND ALL ASSOCIATED TRADES PRIOR TO ANY ORDERING, POURING OR INSTALLATION OF CONCRETE SLABS.
- ALL EXPOSED, NON-POLISHED CONCRETE FLOOR SURFACES TO RECEIVE (2) COATS OF AQUAPEL PLUS SEALER BY L & M CONSTRUCTION CHEMICAL.
- AT ALL AREAS OF EXPOSED CONCRETE FLOOR FINISH, EXTREME CAUTION MUST BE USED TO PROTECT THE FLOOR FROM CERAMIC TILE GROUT. CONTRACTOR IS TO BE RESPONSIBLE FOR THE REMOVAL AND REPAIR OF CONCRETE FLOOR, OR REPLACEMENT OF THE CONCRETE SLAB AND CONCRETE FINISHES OF DAMAGED/ DEFECTIVE AREAS.
- G.C. TO PROTECT BATHING (116) FLOOR AFTER INSTALLATION. CONTRACTOR IS TO BE RESPONSIBLE FOR THE REMOVAL AND REPAIR OF CONCRETE FLOOR, OR REPLACEMENT OF THE CONCRETE SLAB AND CONCRETE FINISHES OF DAMAGED/ DEFECTIVE AREAS.
- G.C. TO PROTECT POLISHED CONCRETE FLOOR SLABS FROM DAMAGE DURING CONSTRUCTION. CONTRACTOR IS TO BE RESPONSIBLE FOR THE REMOVAL AND REPAIR OF CONCRETE FLOOR, OR REPLACEMENT OF THE CONCRETE SLAB AND CONCRETE FINISHES OF DAMAGED/ DEFECTIVE AREAS.
- G.C. TO SUBMIT 2" x 2" MIN. CONCRETE SLAB SAMPLES OF "LIGHT" BROOM CONCRETE FINISH TO PETSMAST CONSTRUCTION MANAGER FOR APPROVAL PRIOR TO INSTALLATION.
- CONCRETE SLAB:
 - CONCRETE CONSTRUCTION JOINTS ALLOWED IN BATHING AND DRYING SLAB, WHERE SHOWN "C.J." INDICATES CONSTRUCTION JOINTS, REFER TO STRUCTURAL DRAWINGS FOR ADDITIONAL INFORMATION
 - ALL CONCRETE SLAB CONSTRUCTION JOINTS IN THE BATHING AND DRYING AREAS TO BE FILLED WITH SIKAFLEX 1A POLYURETHANE SEALANT, U.N.O.
 - CONTRACTOR TO PROVIDE PROTECTION OR COVER ALL TRENCH DRAINS DURING CONSTRUCTION TO PREVENT DEBRIS FROM ENTERING DRAINS. G.C. WILL BE RESPONSIBLE TO PROVIDE VIDEO OF ALL DRAIN LINES.
 - DIMENSIONS ON PLAN ARE TO THE EDGE OF CONCRETE. ENSURE TRANSITIONS THAT OCCUR AT CONSTRUCTION JOINTS OCCUR BELOW OR AT THE FACE OF WALLS TO AVOID VISIBILITY.
 - THE LOCATIONS OF DRAINS AND CONCRETE SLAB DEPRESSED/SLOPED AREAS ARE CRITICAL. ANY DEVIATION FROM THE DIMENSIONS SHOWN ON PLANS IS NOT ACCEPTABLE AND CONCRETE SHALL BE REMOVED AND REPLACED AT THE CONTRACTOR'S COST WITH NO EFFECT TO THE SCHEDULE.

CONCRETE SLAB REPAIR NOTES:

AT EXISTING SLAB; FILL ALL HOLES PRIOR TO INSTALLATION OF POLISHED FLOOR SYSTEM.

CRACK REPAIR, SURFACE SPALLING, POP OUTS OR BOLT HOLES

- USE RAPID REPAIR BY MEGGER INCORP OR APPROVED EQUAL
- SURFACE REPAIR LARGER THAN 6" IN DIAMETER, INFILL 1/2" TO 2" IN DEPTH
- ARDEX PCT - POLISHABLE CONCRETE TOPPING OR APPROVED EQUAL

SLAB SCHEDULE:




LOCATION	THICKNESS	REINFORCEMENT	
BATHING AREA	4"	#4 AT 12" OC EACH WAY CENTER OF SLAB	10 MIL VAPOR RETARDER (ASTM D-2103) OVER 4" GRANULAR SUBBASE
DOG RUN	4"	#4 AT 12" OC EACH WAY CENTER OF SLAB	10 MIL VAPOR RETARDER (ASTM D-2103) OVER 4" GRANULAR SUBBASE
6" INTERIOR SLAB (RECEIVING)	6"	NONE	10 MIL VAPOR RETARDER (ASTM D-2103) OVER 4" GRANULAR
4" INTERIOR SLAB	4"	NONE	10 MIL VAPOR RETARDER (ASTM D-2103) OVER 4" GRANULAR
SIDEWALK	4"	NONE	4" GRANULAR

SLAB CUTTING AND FILL:

THE CONTRACTOR IS REQUIRED TO PROVIDE ALL SLAB CUTTING, TRENCHING, REMOVAL AND PATCHING/INFILL TO ACCOMMODATE ALL REQUIRED NEW BELOW SLAB SANITARY PIPING. REFER AND COORDINATE WITH PLUMBING DRAWINGS P1.0, P1.1 AND MECHANICAL CONTRACTOR.

FOR SLAB INFILL:

- CONTRACTOR TO ADD CLEAN SAND FILL MIN. 12" COVERAGE AROUND PIPING AND 3/4" GRANULAR FILL MATCHING EXISTING SUBBASE.
- PROVIDE 12" LONG DOWELS AT 18" O.C. DOWELED AND EMBED 6" INTO EXISTING CONCRETE SLAB WITH HILTI HIT-HY 200 ADHESIVE.
- AT UTILITY TRENCHES PROVIDE #5 CONTINUOUS AT 12" O.C. IN LONG DIRECTION CENTERED IN REPLACEMENT SLAB.

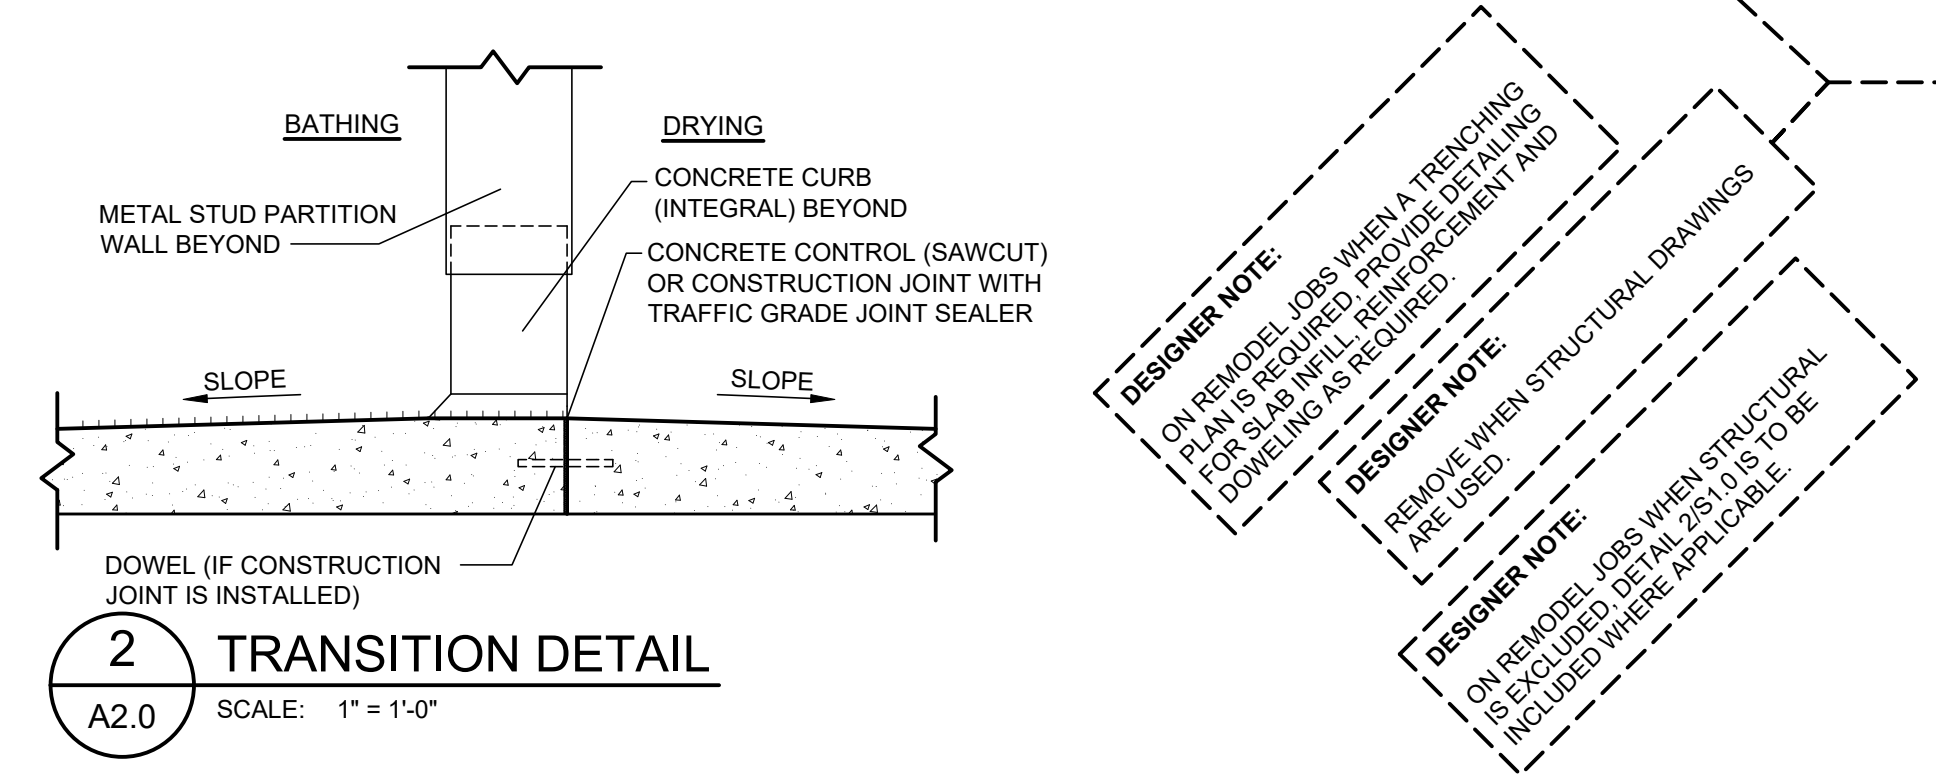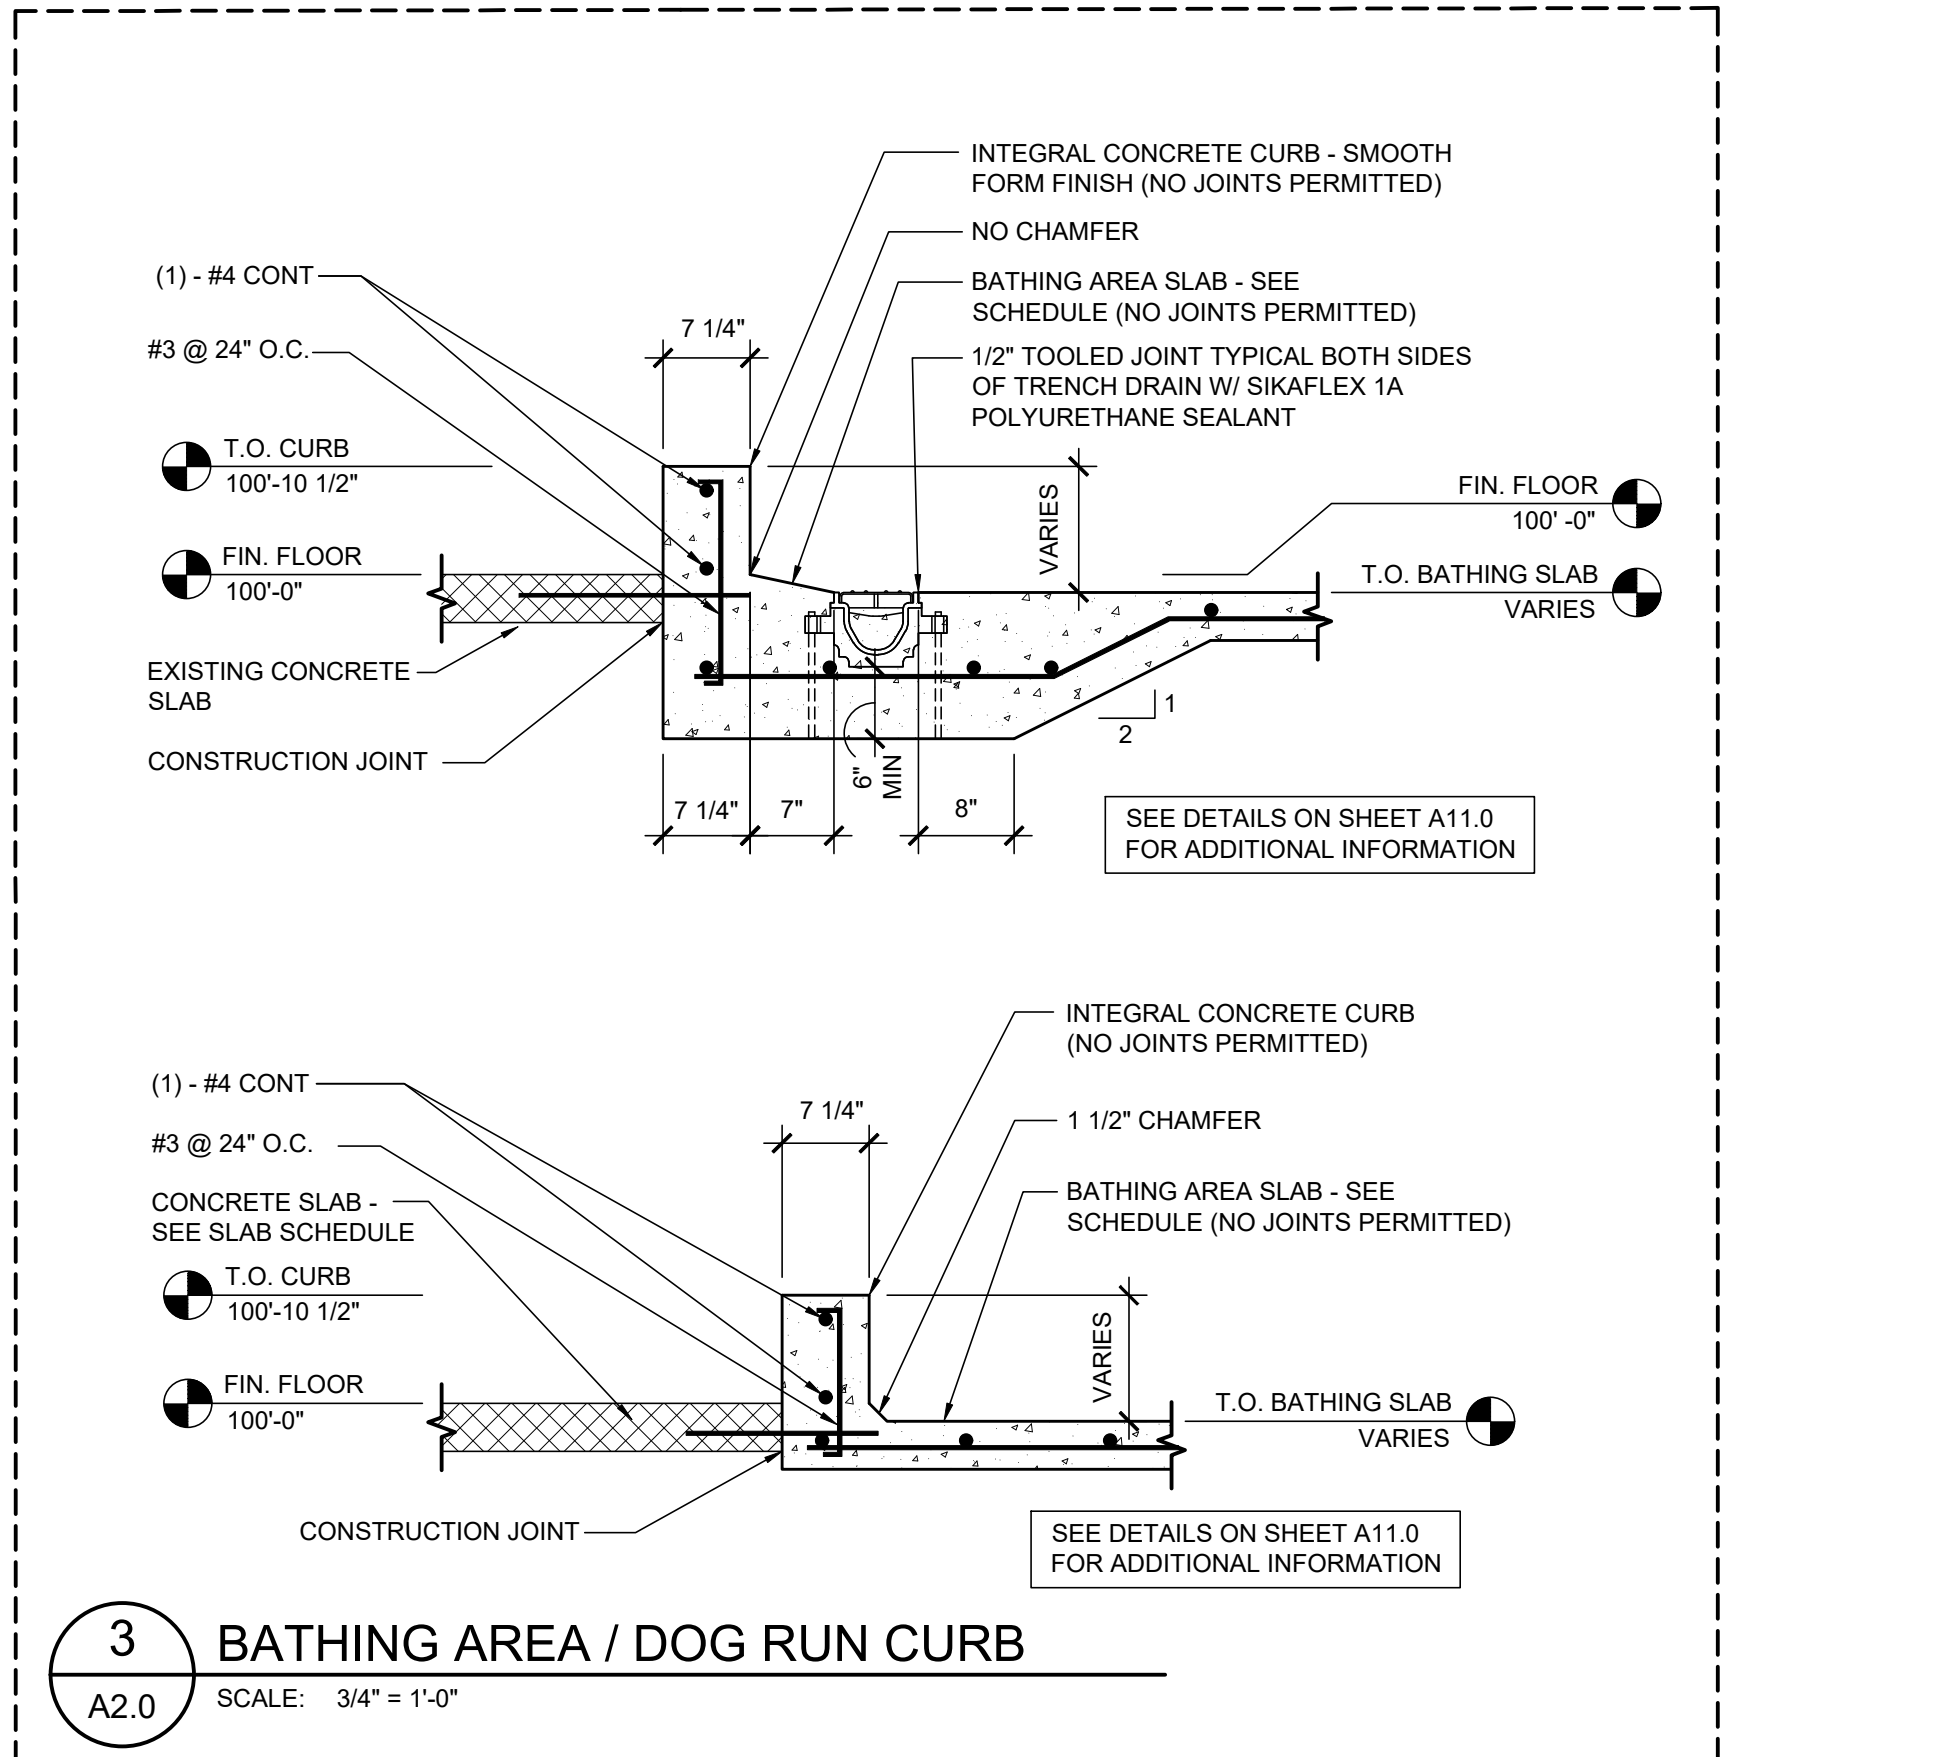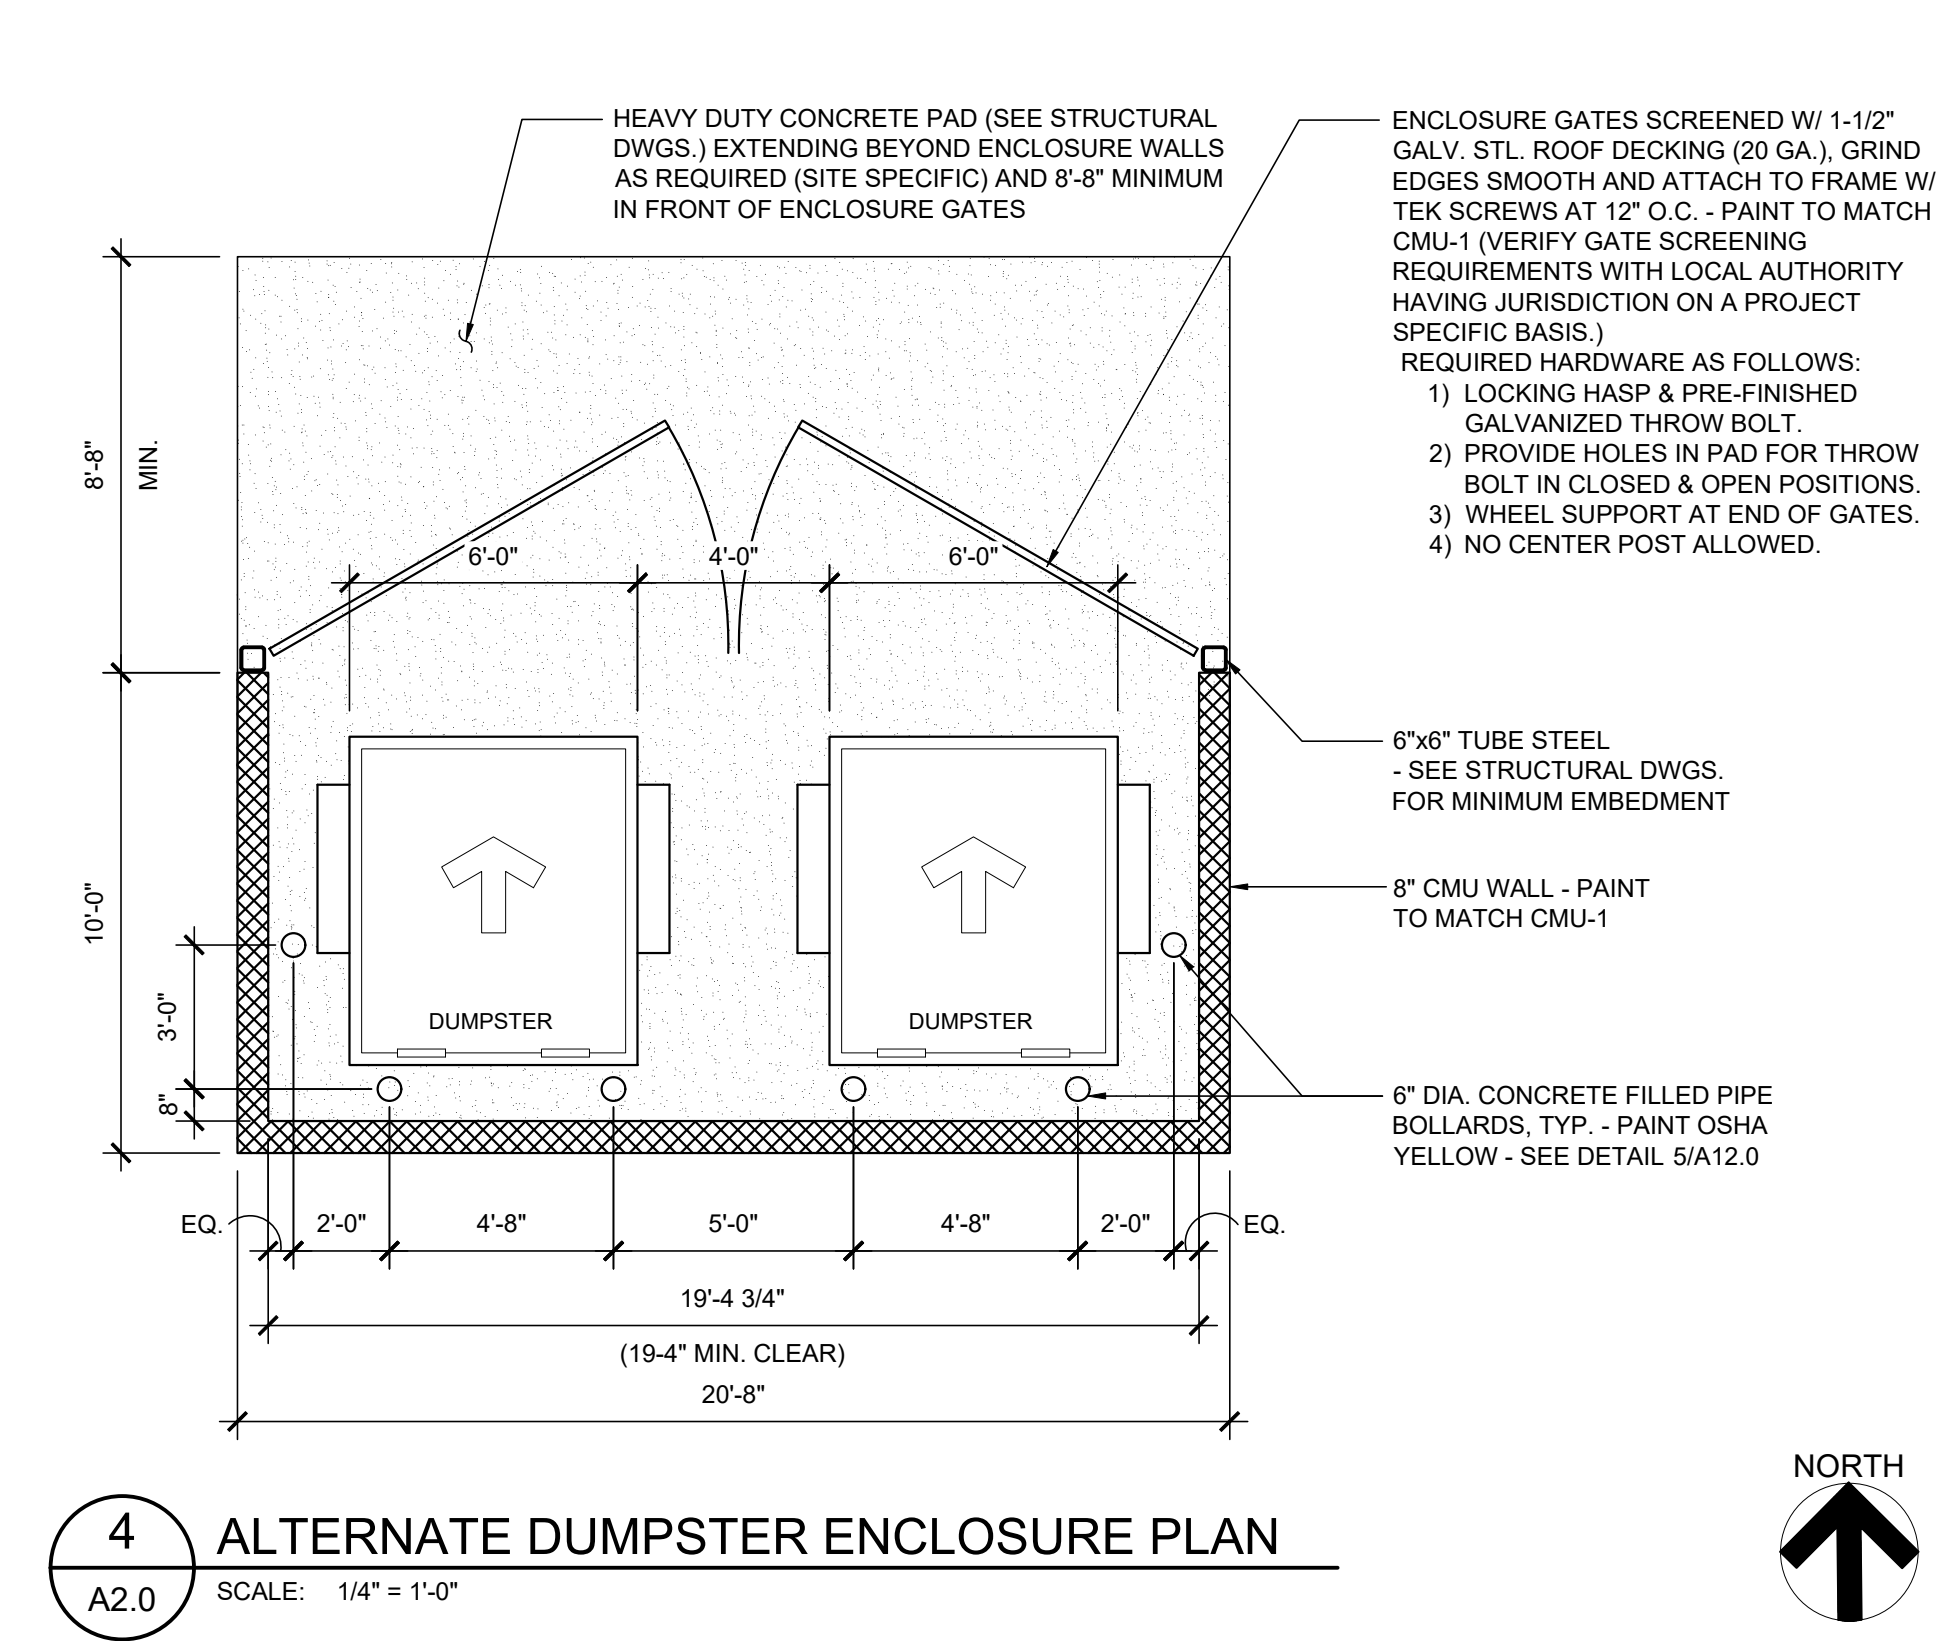

PETSMART

19601 North 27th Avenue
Phoenix, Arizona 85027 - (623) 580-6100

PROJECT: 18K 2025 U.S. VET SERVICES INSTRUCTION SET

DATE: FEBRUARY 12, 2025

ARCHITECT:

CONSULTANT:

SEAL:

DATE:

PROJECT NO: 18K 2025 US INSTRUCTION SET

ORIGINAL SCALE: AS INDICATED

DRAWN BY: XXXX

CHECKED BY: XXXX

PAGE #: 01 OF 56

DISCIPLINE: ARCHITECTURAL

FILE:

SHEET NUMBER: A2.0

FLOOR FINISH PLAN