
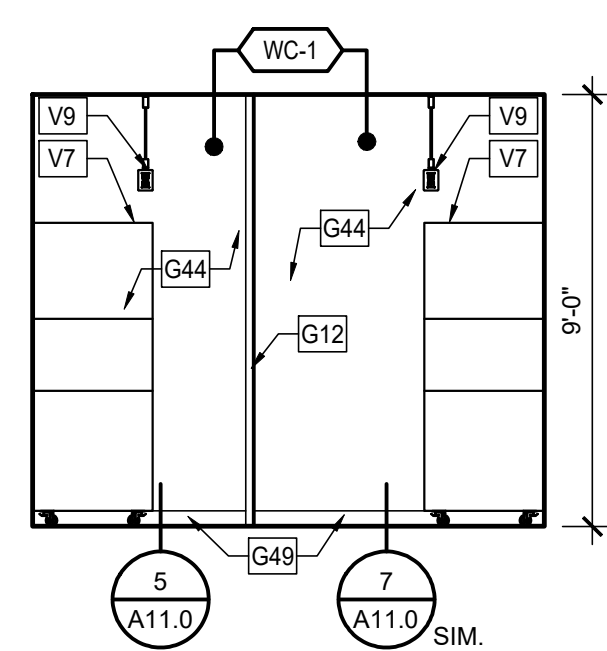
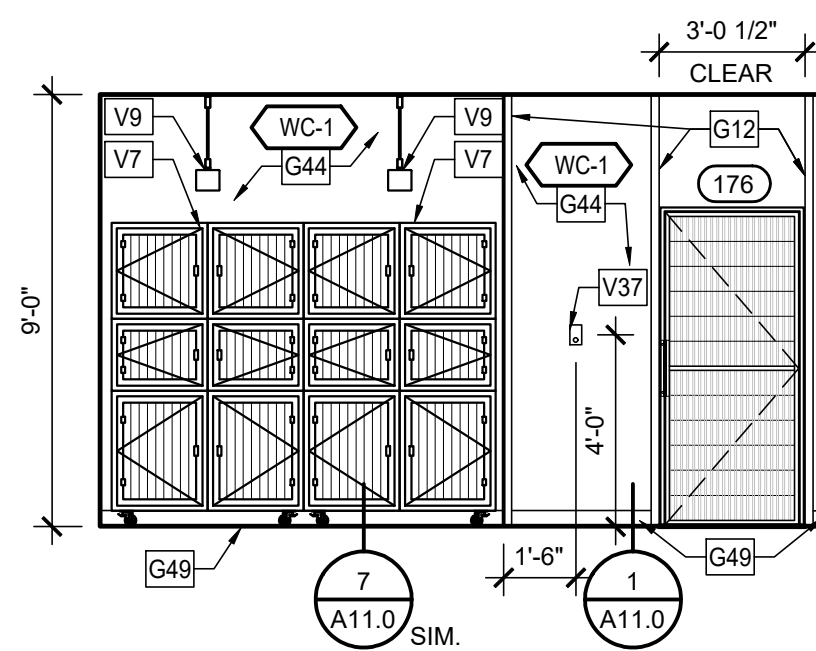
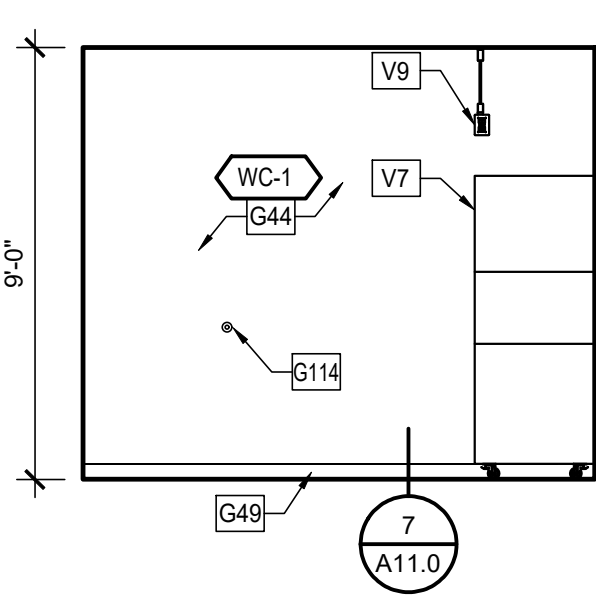
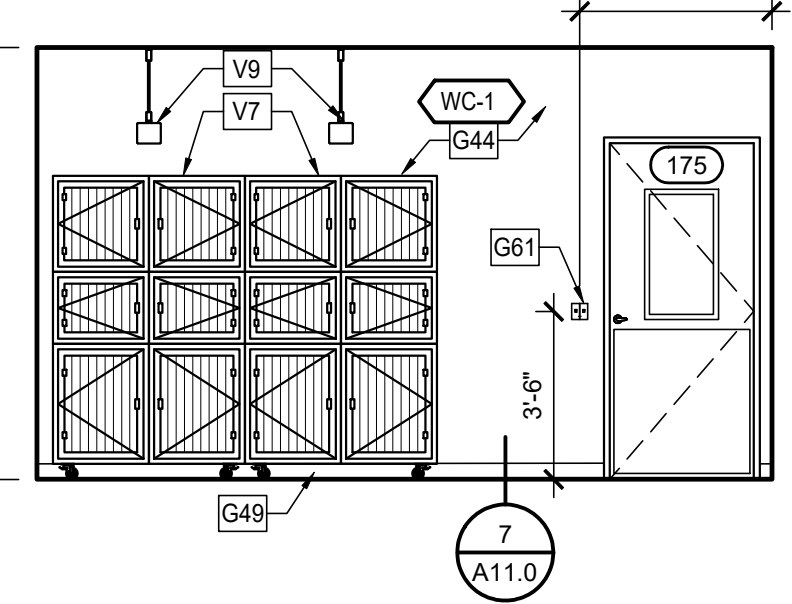
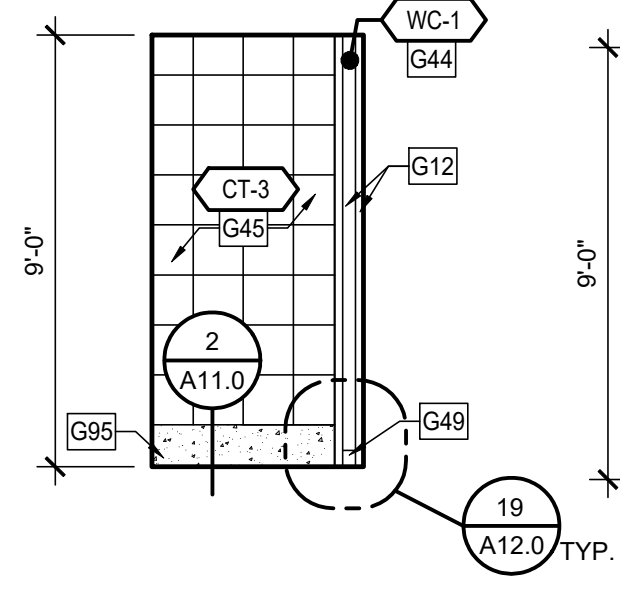
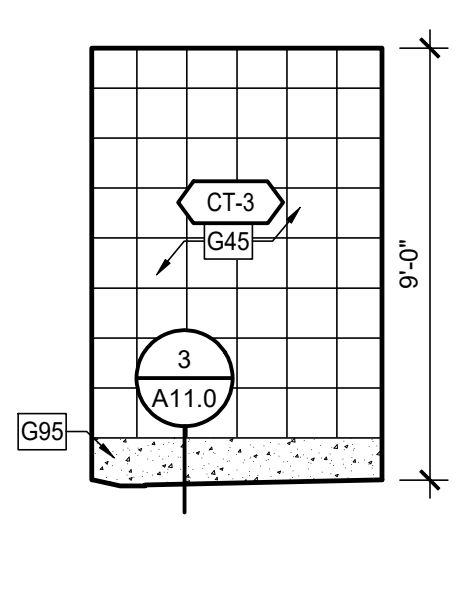
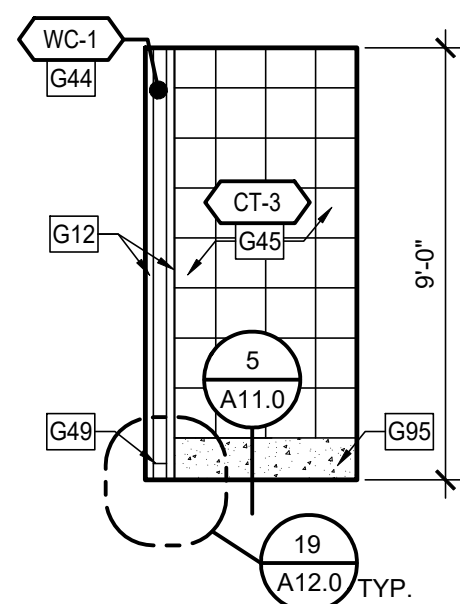
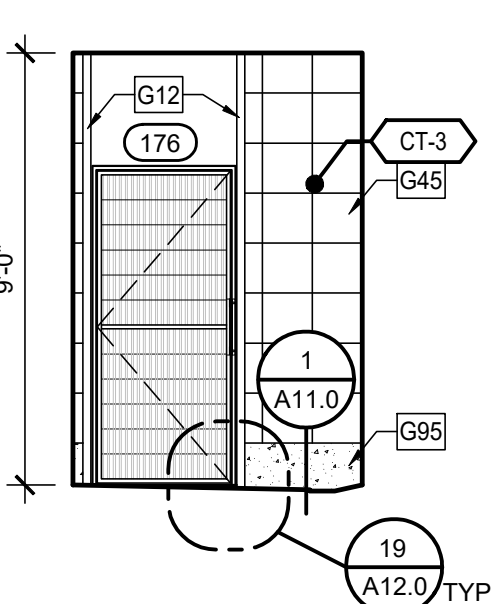
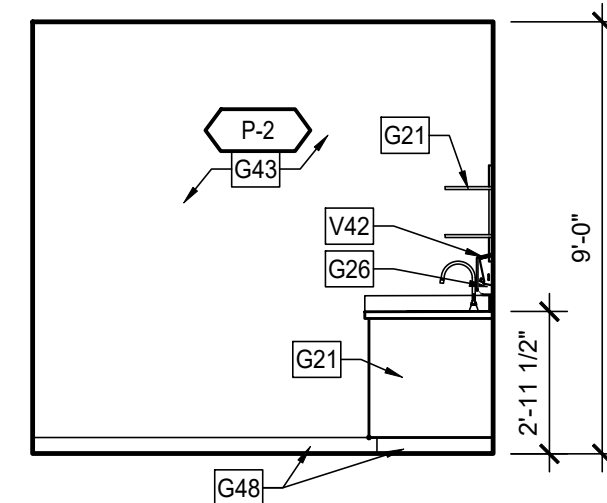
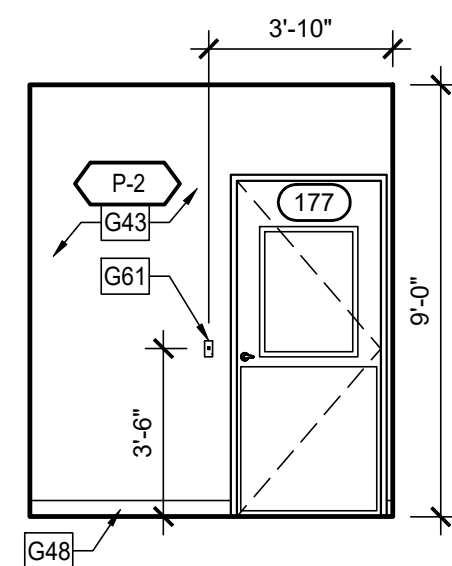
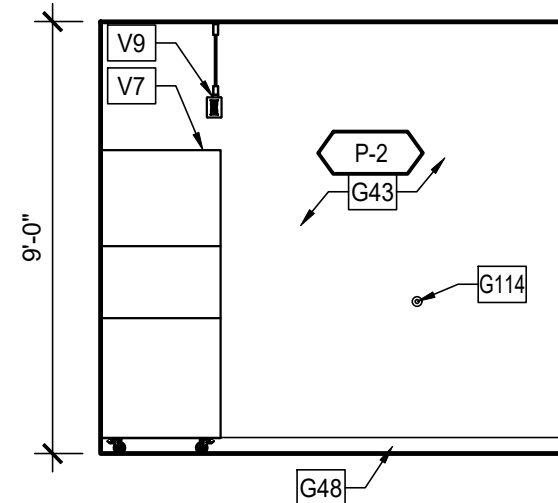
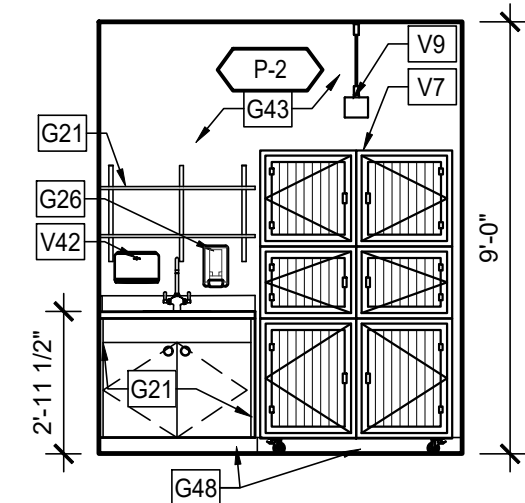
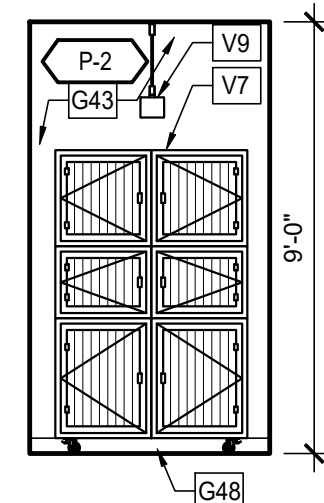
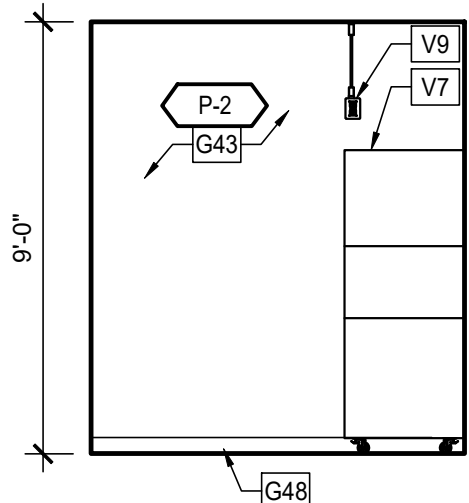
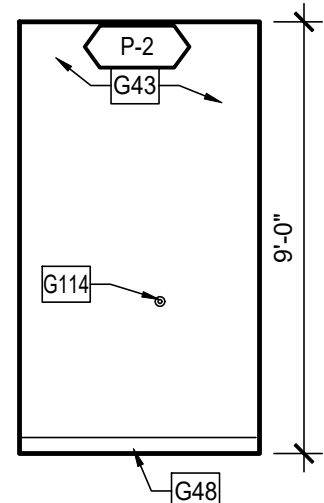


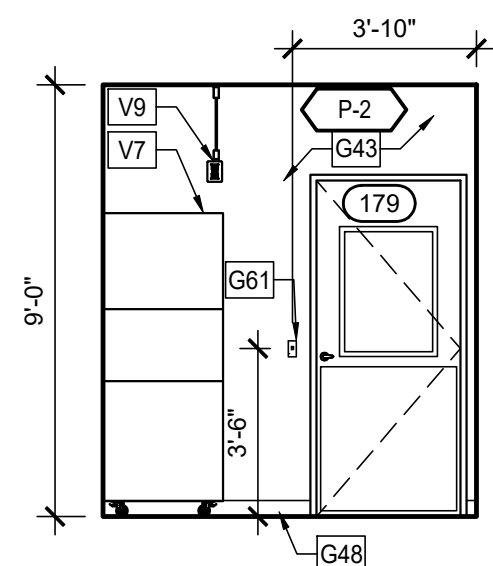

GENERAL NOTES:

1. SEE SHEET AO.1 FOR ARCHITECTURAL KEY NOTES.

FRP GENERAL NOTES:

1. MILLWORK VENDOR HIRED BY G.C. SHALL PROVIDE AND INSTALL FRP SYSTEM. IT IS THE G.C. RESPONSIBILITY TO INCLUDE THEIR PRICE IN HIS BID.

2. THERE WILL BE NO EXCEPTIONS. THE AREAS THAT RECEIVE THE FRP MUST BE PROPERLY PREPARED. IF THE AREAS ARE NOT CLEAN, PROPERLY PREPARED AND PROPERLY LINED CAUSING A DELAY IN INSTALLATION, THE GC WILL BE REQUIRED TO PAY MILLWORK VENDOR FOR EACH DAY LONGER THAT THE INSTALL TAKES AS WELL AS THE COST TO PREPARE THE AREAS CORRECTLY. THE COST FOR DELAY WILL BE PAID DIRECTLY TO MILLWORK VENDOR.

3. GENERAL CONTRACTORS SHALL BE RESPONSIBLE FOR PROVIDING MATERIAL TAKE-OFF FOR ORDERINGS OF THE FRP, TRIM AND BASE (MILLWORK VENDOR TO SUPPLY AND INSTALL).

4. TYPICAL LEAD TIME FOR FRP MATERIALS IS TO BE COORDINATED WITH MILLWORK VENDOR.

TILE INSTALLATION CRITERIA:

1. EXPOSED OR SHARP EDGES ARE NOT PERMITTED. FACTORY FINISHED EDGES (NOT FIELD CUT EDGES) MAY BE EXPOSED ONLY WHERE INDICATED IN THE DRAWINGS.

2. THE LAYOUT OF THE TILE WAINSCOT, SHOWN ON THE INTERIOR ELEVATIONS, IS TO BE LAID OUT SUCH THAT THE FIELD IS EQUAL, CENTERED, FROM END OF THE WALL TO THE OPPOSITE END UNLESS NOTED OTHERWISE. THERE WILL TYPICALLY BE CUT TILES ON BOTH ENDS AND THERE SHALL NEVER BE LESS THAN 1/2 OF ONE TILE USED IN THE FIELD OF THE WAINSCOT. UNLESS SPECIFIED START POINT OR ROOM CONFIGURATION DICTATES TILE TO BE LESS THAN 1/2 OF ONE TILE.

3. IN ALL ROOMS WITH FLOOR TILE AND MATCHING WALL TILE WAINSCOT AND TILE BASE, THE JOINTS OF THE FLOOR AND WALL TILES ARE TO ALIGN.

MISC. BLOCKING SCHEDULE:

ROOM NAME	ROOM NUMBER	BLOCKING FOR		MATERIAL	
VET SERVICES CHECK-IN	170	WALL BUMPER GUARDS		8" METAL STRAP	
TREATMENT	172	DIGITAL TREATMENT BOARD MOUNT		3/4" X 60" X 36" PLYWOOD	
		SCAVENGER PUMP (ABOVE CEILING)		3/4" X 24" X 24" PLYWOOD	
		SOAP DISPENSER		3/4" PLYWOOD	
		PAPER TOWEL DISPENSER		3/4" PLYWOOD	
X-RAY	174	DOOR STOP		3/4" PLYWOOD	
		X-RAY DISCONNECT		3/4" X 24" PLYWOOD	
KENNEL ROOM	175	DOOR STOP		3/4" PLYWOOD	
		DOOR STOP		3/4" PLYWOOD	
ISOLATION	177	DOOR STOP		3/4" PLYWOOD	
		SOAP DISPENSER		3/4" PLYWOOD	
		PAPER TOWEL DISPENSER		3/4" PLYWOOD	
SUPPORT	178	HOT WATER RECIRCULATION PUMP ASSEMBLY		3/4" X 48" PLYWOOD	
		WH-3 SEISMIC WALL STRAPS		3/4" X 24" PLYWOOD	
		ET-2 SEISMIC WALL STRAPS		3/4" X 24" PLYWOOD	
		WH-3 DISCONNECT		3/4" X 24" PLYWOOD	
		DOOR STOP		3/4" PLYWOOD	
		SOAP DISPENSER		3/4" PLYWOOD	
FELINE WARD	179	PAPER TOWEL DISPENSER		3/4" PLYWOOD	
EXAM #1	181	DOOR STOP		3/4" PLYWOOD	
		HAND SANITIZER		3/4" PLYWOOD	
EXAM #2	182	PAPER TOWEL DISPENSER		3/4" PLYWOOD	
		DOOR STOP		3/4" PLYWOOD	
EXAM #3	183	HAND SANITIZER		3/4" PLYWOOD	
		PAPER TOWEL DISPENSER		3/4" PLYWOOD	
ADA EXAM #4	184	DOOR STOP		3/4" PLYWOOD	
		HAND SANITIZER		3/4" PLYWOOD	
		PAPER TOWEL DISPENSER		3/4" PLYWOOD	

MILLWORK BLOCKING SCHEDULE:

ELEV.	ROOM		APPROX TOTAL FEET	MATERIAL	HEIGHT A.F.F.
	NAME	NUMBER			
1/A8.4	PHARMACY	171	8'-0"	2X6	4", 70"
3/A8.4	PHARMACY	171	24'-0"	2X6	29", 60", 95 3/4"
1/A8.4	TREATMENT	172	33'-0"	2X6	29", 60", 95 3/4"
3/A8.4	TREATMENT	172	11'-0"	2X6	29"
3/A8.4	TREATMENT	172	37'-0"	2X6	29", 60", 95 3/4"
3/A8.4	TREATMENT	172	4'-0"	2X6	78", 95 3/4"
3/A8.4	TREATMENT	172	5'-0"	3/4" X 48" PLYWD	48"
4/A8.4	TREATMENT	172	8'-0"	2X6	54", 60", 66", 72"
27/A8.4	X-RAY	174	4'-0"	3/4" X 12" PLYWD	6", 55 1/2"
12/A8.5	ISOLATION	177	4'-0"	2X6	29"
12/A8.5	ISOLATION	177	4'-0"	3/4" X 36" PLYWD	48"
30/A8.4	SUPPORT	178	5'-0"	3/4" X 48" PLYWD	48"
32/A8.4	SUPPORT	178	5'-0"	3/4" X 48" PLYWD	48"
19/A8.4	EXAM #1	181	3'-0"	2X6	29"
19/A8.4	EXAM #1 (EXAM TABLE)	181	20'-0"	2X6	15", 21", 27", 32" 41"
19/A8.4	EXAM #1 (EXAM TABLE)	181	4'-0"	3/4" X 96" PLYWD	0"
20/A8.4	EXAM #1 (EXAM BENCH)	181	3'-0"	3/4" X 6" PLYWD	30"
13/A8.4	EXAM #2	182	3'-0"	2X6	29"
13/A8.4	EXAM #2 (EXAM TABLE)	182	20'-0"	2X6	15", 21", 27", 32" 41"
13/A8.4	EXAM #2 (EXAM TABLE)	182	4'-0"	3/4" X 96" PLYWD	0"
16/A8.4	EXAM #2 (EXAM BENCH)	182	3'-0"	3/4" X 6" PLYWD	30"
9/A8.4	EXAM #3	183	3'-0"	2X6	29"
9/A8.4	EXAM #3 (EXAM TABLE)	183	20'-0"	2X6	15", 21", 27", 32" 41"
9/A8.4	EXAM #3 (EXAM TABLE)	183	4'-0"	3/4" X 96" PLYWD	0"
12/A8.4	EXAM #3 (EXAM BENCH)	183	3'-0"	3/4" X 6" PLYWD	30"
5/A8.4	ADA EXAM #4	184	3'-0"	2X6	27"
5/A8.4	ADA EXAM #4 (EXAM TABLE)	184	20'-0"	2X6	13", 18 1/2", 24", 29 1/2", 35"
5/A8.4	ADA EXAM #4 (EXAM TABLE)	184	4'-0"	3/4" X 96" PLYWD	0"
8/A8.4	ADA EXAM #4 (EXAM BENCH)	184	3'-0"	3/4" X 6" PLYWD	30"

CONTRACTOR SHALL VERIFY MILLWORK BLOCKING LOCATIONS & EXTENT WITH NATIONAL ACCOUNT MILLWORK VENDOR

NOTE: ALL MILLWORK IS SUPPLIED AND INSTALLED BY G.C. AS PART OF G.C. SCOPE THRU NATIONAL ACCOUNT MILLWORK VENDOR (SEE SHEET F2.0). ALL BLOCKING/BACKING IS SUPPLIED AND INSTALLED BY GENERAL CONTRACTOR.

REFER TO DETAIL 3/A12.1 FOR EXAM TABLE BLOCKING DETAIL