


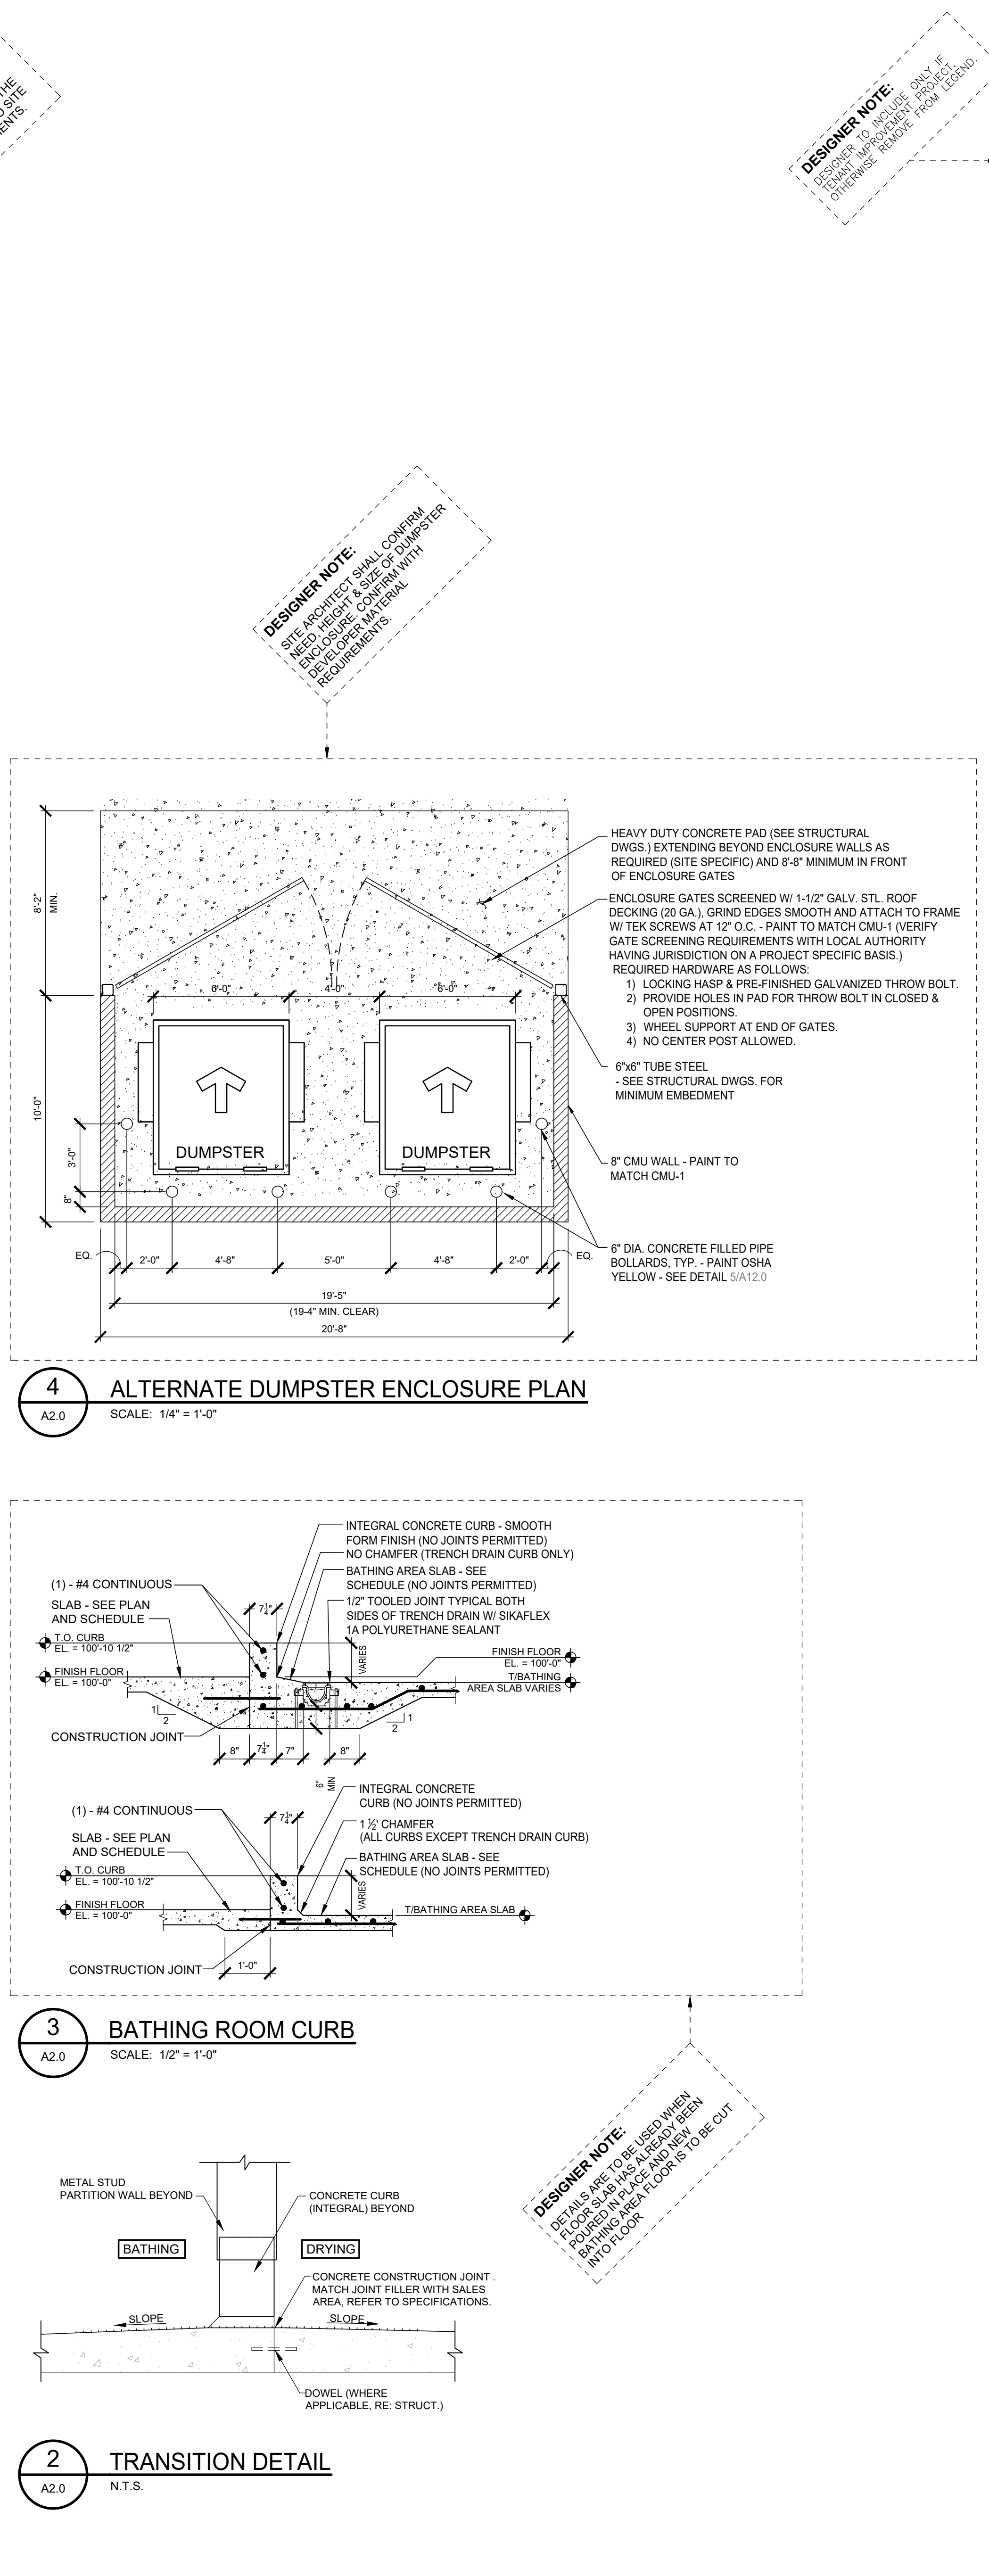

LEGEND:

SLOPED CONCRETE SLAB

POLISHED OR EXPOSED CONCRETE FLOOR FINISH

EXISTING EXTERIOR WALLS BY BASE BUILDING

INDICATES DIRECTION OF SLOPE DOWN.

FLOOR FINISH LEGEND :

NOTE:

CONTRACTOR TO SEE SHEET P-2.0' FOR LIST OF REQUIRED POLISHED CONCRETE VENDORS

(FC-1) POLISHED CONCRETE - AMERIPOLISH SYSTEM (NO COLOR & POLISH TO #800 GRIT. FILUSEAL ALL CONSTRUCTION AND CONTROL JOINTS (COLOR TO MATCH). SEE SPECIFICATIONS.

(FC-2) EXPOSED CONCRETE WITH (LIGHT) SOFT BROOM FINISH, HARD TROWLED SMOOTH AND FINISHED WITH A VERY SOFT HORSE HAIR BRUSH (ERR ON THE SIDE OF SMOOTH). PETSMART CONSTRUCTION MANAGER TO HAVE FINAL APPROVAL OF FINISH. LIGHTLY STONE AS NEEDED TO MINIMIZE ROUGHNESS. APPLY (2) COATS OF "AQUAPEL PLUS" SEALER AS MANUFACTURED BY L&M CONSTRUCTION CHEMICAL. DIRECTION OF SLOPE AS INDICATED.

GENERAL NOTES:

SEE SHEET A0.1 FOR ARCHITECTURAL KEY NOTES

NO VISIBLE FLOOR CUTS ACCEPTABLE @ ANY LOCATIONS OTHER THAN THOSE INDICATED IN THE DRAWINGS, UNLESS APPROVED BY PETSMART CONSTRUCTION MANAGER.

ALL FLOOR FINISH DIMENSIONS ON THIS SHEET ARE TO FINISHED SURFACE UNLESS NOTED OTHERWISE.

ALL WALLS BEHIND MILLWORK SHALL HAVE FINAL FINISH PRIOR TO INSTALLATION. ALL FLOORING FINISH MATERIAL SHALL BE INSTALLED PRIOR TO MILLWORK INSTALLATION.

CERAMIC TILE TO EXTEND UNDER ALL FIXTURES, MILLWORK & EQUIPMENT UNLESS NOTED OTHERWISE.

ASSUMED FINISH FLOOR ELEVATION WITHIN THE ARCHITECTURAL DRAWINGS IS AT 100.00".

G.C. TO CLEAN NON-POLISHED SLABS (LT.BROOM AREAS) WITH A HARD BRISTLE BRUSH. DO NOT DAMAGE THE FINISH.

G.C. TO SCHEDULE A "PRE-SLAB" MEETING WITH PETSMART AND ALL ASSOCIATION TRADES PRIOR TO ANY ORDERING, POURING OR INSTALLATION OF CONCRETE SLABS.

ALL EXPOSED, NON-POLISHED CONCRETE FLOORS TO RECEIVE 2 COATS OF AQUA-PEL PLUS SEALER BY L&M CONSTRUCTION CHEMICAL.

AT ALL AREAS OF EXPOSED CONCRETE FLOOR FINISH, EXTREME CAUTION MUST BE USED TO PROTECT THE FLOOR FROM CERAMIC TILE GROUT. CONTRACTOR IS TO BE RESPONSIBLE FOR THE REMOVAL AND REPAIR OF CONCRETE FLOOR, OR REPLACEMENT OF THE CONCRETE SLAB AND CONCRETE FINISHES OF THE AFFECTED AREAS.

G.C. TO PROTECT BATHING (116) & DRYING (115) FLOORS AFTER INSTALLATION. CONTRACTOR IS TO BE RESPONSIBLE FOR THE REMOVAL AND REPAIR OF CONCRETE FLOOR, OR REPLACEMENT OF THE CONCRETE SLAB AND CONCRETE FINISHES OF THE AFFECTED AREAS.

G.C. TO PROTECT POLISHED CONCRETE FLOOR SLABS FROM DAMAGE DURING CONSTRUCTION. CONTRACTOR IS TO BE RESPONSIBLE FOR THE REMOVAL AND REPAIR OF CONCRETE FLOOR, OR REPLACEMENT OF THE CONCRETE SLAB AND CONCRETE FINISHES OF THE AFFECTED AREAS.

CONCRETE SLAB:

- CONCRETE CONSTRUCTION JOINTS ALLOWED IN BATHING AND DRYING SLAB WHERE SHOWN "C.J." SPECIFICALLY IDENTICES CONSTRUCTION JOINTS REFER TO STRUCTURAL FOR ADDITIONAL INFORMATION. SEE DETAIL SA2.0.
- ALL CONCRETE SLAB CONSTRUCTION JOINTS IN THE BATHING AND DRYING TO BE FILLED WITH SIKAFLEX-A POLYURETHANE SEALANT.
- CONTRACTOR TO PROVIDE PROTECTION TO PREVENT DEBRIS FROM ENTERING DRAINS, E.G., WILL BE RESPONSIBLE TO PROVIDE VIDEO OF ALL DRAIN LINES.
- DIMENSIONS ON PLAN ARE TO THE EDGE OF CONCRETE. ENSURE TRANSITIONS THAT OCCUR AT CONSTRUCTION JOINTS OCCUR UNDER OR AT FACE OF WALLS TO AVOID JOINT CRACKING VISIBILITY.
- "THE LOCATIONS OF DRAINS AND CONCRETE SLAB DEPRESSED/SLOPED AREAS ARE CRITICAL. ANY DEVIATION FROM THE DIMENSIONS SHOWN ON PLANS IS NOT ACCEPTABLE AND CONCRETES SHALL BE REMOVED AND REPAIRED AT THE CONTRACTORS COST WITH NO EFFECT TO THE SCHEDULE."

CONCRETE SLAB REPAIR NOTES:

AT EXISTING SLAB, FILL ALL HOLES PRIOR TO INSTALLATION OF POLISHED FLOOR FINISH.

CRACK REPAIR, SURFACE SPALLING, POP OUTS OR BOLT HOLES

- RAMP RET-FLOOR (METRIC) REQUIRE CORRODED EQUAL SURFACE REPAIR LARGER THAN 6" IN DIAMETER, INFILL 1/2" TO 2" IN DEPTH
- ADEX PCT - POLISHABLE CONCRETE TOPPING OR APPROVED EQUAL

SLAB SCHEDULE:

LOCATION

THICKNESS

REINFORCEMENT

BATHING AREA
DRIVING AREA

4"

#4 AT 12" OC EACH WAY
CENTERS OF SLAB

10 MIL VAPOR RETARDER (ASTM D-2103) OVER 4" GRANULAR (SEE SOILS REPORT)

6" INTERIOR
SLAB (RECEIVING)

6"

SEE STRUCTURAL
DRAWINGS AND SOIL
REPORT

10 MIL VAPOR RETARDER (ASTM D-2103) OVER 4" GRANULAR (SEE SOILS REPORT)

4" INTERIOR
SLAB

4"

SEE STRUCTURAL
DRAWINGS AND SOIL
REPORT

10 MIL VAPOR RETARDER (ASTM D-2103) OVER 4" GRANULAR (SEE SOILS REPORT)

SIDEWALK

4"

SEE STRUCTURAL
DRAWINGS AND SOIL
REPORT

4" GRANULAR

SLAB CUTTING AND FILL:

THIS CONTRACTOR IS REQUIRED TO PROVIDE ALL SLAB CUTTING, TRENCING, REMOVAL, AND PATCHING/INFILL TO ACCOMMODATE ALL REQUIRED NEW UNDER FLOOR SANITARY PIPING, REFER AND COORDINATE WITH PLUMBING DRAWINGS P1.0, P1.1, AND MECHANICAL CONTRACTOR.

FOR SLAB INFILL:

- CONTRACTOR TO CLEAR SAND FILL MIN. 12" COVER AROUND PIPING, 3/4" CLEAN STONE FILL MATCHING EXISTING LAYERING.
- PROVIDE 24" LONG DOWELS AT 24" O.C. DOWELLED AND HILT INTO EXISTING SLAB EDGE 12" DEEP.
- PROVIDE 6X6 WIRE MESH SETBACK AND SECURE TO DOWELS WITH WIRE TIES. OVERLAY SHEETS ONE TO TWO FEET OTHER. TROUGH EXISTING SLAB EDGE AND PROVIDE CONCRETE BONDING AGENT TO CLEAN SURFACE OF EXISTING SLAB FOR ADHESION WITH NEW.
- FILL CAVITY WITH POURED CONCRETE OF 25MPa MATCHING EXISTING SURFACE AND FINISH. FEATHER SMOOTH JOINTS AND MAKE SEAMLESS.

CUSTOMER:

PET SMART

19601 North 27th Avenue
Phoenix, Arizona 85027 • (623) 580-6100

CUSTOMER REF #: 1234

PROJECT:

14K 2026 CANADIAN INSTRUCTION SET

AUGUST 05, 2026

CONSULTANT:

ARCHITECT:

SEAL:

CITY SEAL:

DESIGNER NOTE:
SHOW ALL DIMENSIONS AND INFORMATION ON PERMANENT STORED ONLY

DISCLAIMER: OUR DRAWING AND DESIGN IS COPYRIGHT PROTECTED WHICH SHOULD NOT BE USED, REPRODUCED OR REVISED WITHOUT WRITTEN PERMISSION BY PETSMART. THE CONTRACTOR SHALL CHECK AND VERIFY ALL DIMENSIONS AND UTILITY LOCATIONS AND REPORT ALL ERRORS AND OMISSIONS PRIOR TO COMMENCING WORK.
THIS DRAWING IS NOT TO BE SEALED.

ISSUED FOR:

NOMBRE

ISSUE

DATE

PROJECT NO.: CAO073426.0987 DATE: 05.08.26 ORIGINAL SCALE: AS NOTED DESIGNED BY: DRIVEN BY: CHECKED BY: PAGE #: 7 OF: 54 DISCIPLINE: ARCHITECTURAL TITLE: SHEET NUMBER: A2.0