
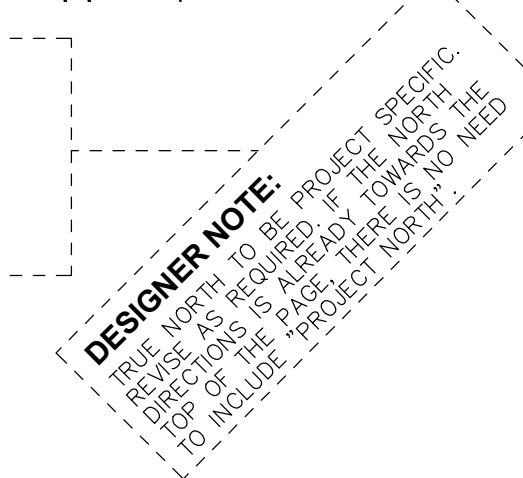




4. HOLD ELECTRICAL CONDUIT TIGHT AS POSSIBLE TO TOP CHORD OF JOISTS.
5. **ALL EQUIPMENT, WATER LINES, CEILING GRID, HVAC DUCTWORK, ROOF LEADER PIPING, CONDUITS, LIGHT FIXTURES, AND FIRE SPRINKLER LINES MUST BE SUSPENDED FROM THE JOISTS ONLY. DO NOT LAY ALONG THE BOTTOM CHORD OF JOISTS OR SUSPEND FROM THE ROOF DECK.**
6. H.V.A.C. DUCTWORK TO BE INSTALLED IN JOIST SPACE ON CERTAIN PROJECTS. BOTTOM OF DUCTWORK TO BE ABOVE BOTTOM OF JOIST. VERIFY WITH MECHANICAL SHEETS ON EACH PROJECT FOR SPECIFIC REQUIREMENTS AND EXACT LOCATION OF DUCTWORK.
7. THIS DETAIL TO BE DISTRIBUTED TO ALL CONTRACTORS INSTALLING WORK LISTED.
8. PIPING AND/OR CONDUIT PENETRATING WALLS, IN CUSTOMER AREAS, SHALL BE COMPLETED IN ADJACENT METAL STUD WALLS OR BOXED OUT, TO BE HIDDEN FROM CUSTOMERS VIEW. ALL BOX OUT AREAS ARE TO BE AS SMALL AS POSSIBLE AND BE APPROVED BY ARCHITECT AND OWNER PRIOR TO INSTALLATION.

CLIENT:  19601 North 27th Avenue Phoenix, Arizona 85027 - (623) 580-6100		
CLIENT REF # : 1234		
PROJECT:		
14K 2026 CANADIAN INSTRUCTION SET		
AUGUST 05, 2026		
CONSULTANT:		
ARCHITECT:		
SEAL:		
CITY SEAL:		
DISCLAIMER: COPYRIGHT: THIS DRAWING AND DESIGN IS COPYRIGHT PROTECTED WHICH SHALL NOT BE LOANED, REPRODUCED OR REVISED WITHOUT WRITTEN PERMISSION BY PETSMART. THE CONTRACTOR SHALL CHECK AND VERIFY ALL DIMENSIONS AND UTILITY LOCATIONS AND REPORT ALL ERRORS AND OMISSIONS PRIOR TO COMMENCING WORK.		
THIS DRAWING IS NOT TO BE SCALED.		
ISSUED FOR:		
NUMBER	ISSUE	DATE
PROJECT NO: CAO073426.0987		DATE: 05.08.26
ORIGINAL SCALE: AS NOTED		IF THIS BAR IS NOT 1" LONG, ADJUST YOUR PLOTTING SCALE. 
DESIGNED BY:		
DRAWN BY:		
CHECKED BY:		
PAGE #: 12	OF: 54	
DISCIPLINE: ARCHITECTURAL		
TITLE: ENLARGED REFLECTED CEILING		
SHEET NUMBER: A3.1		