


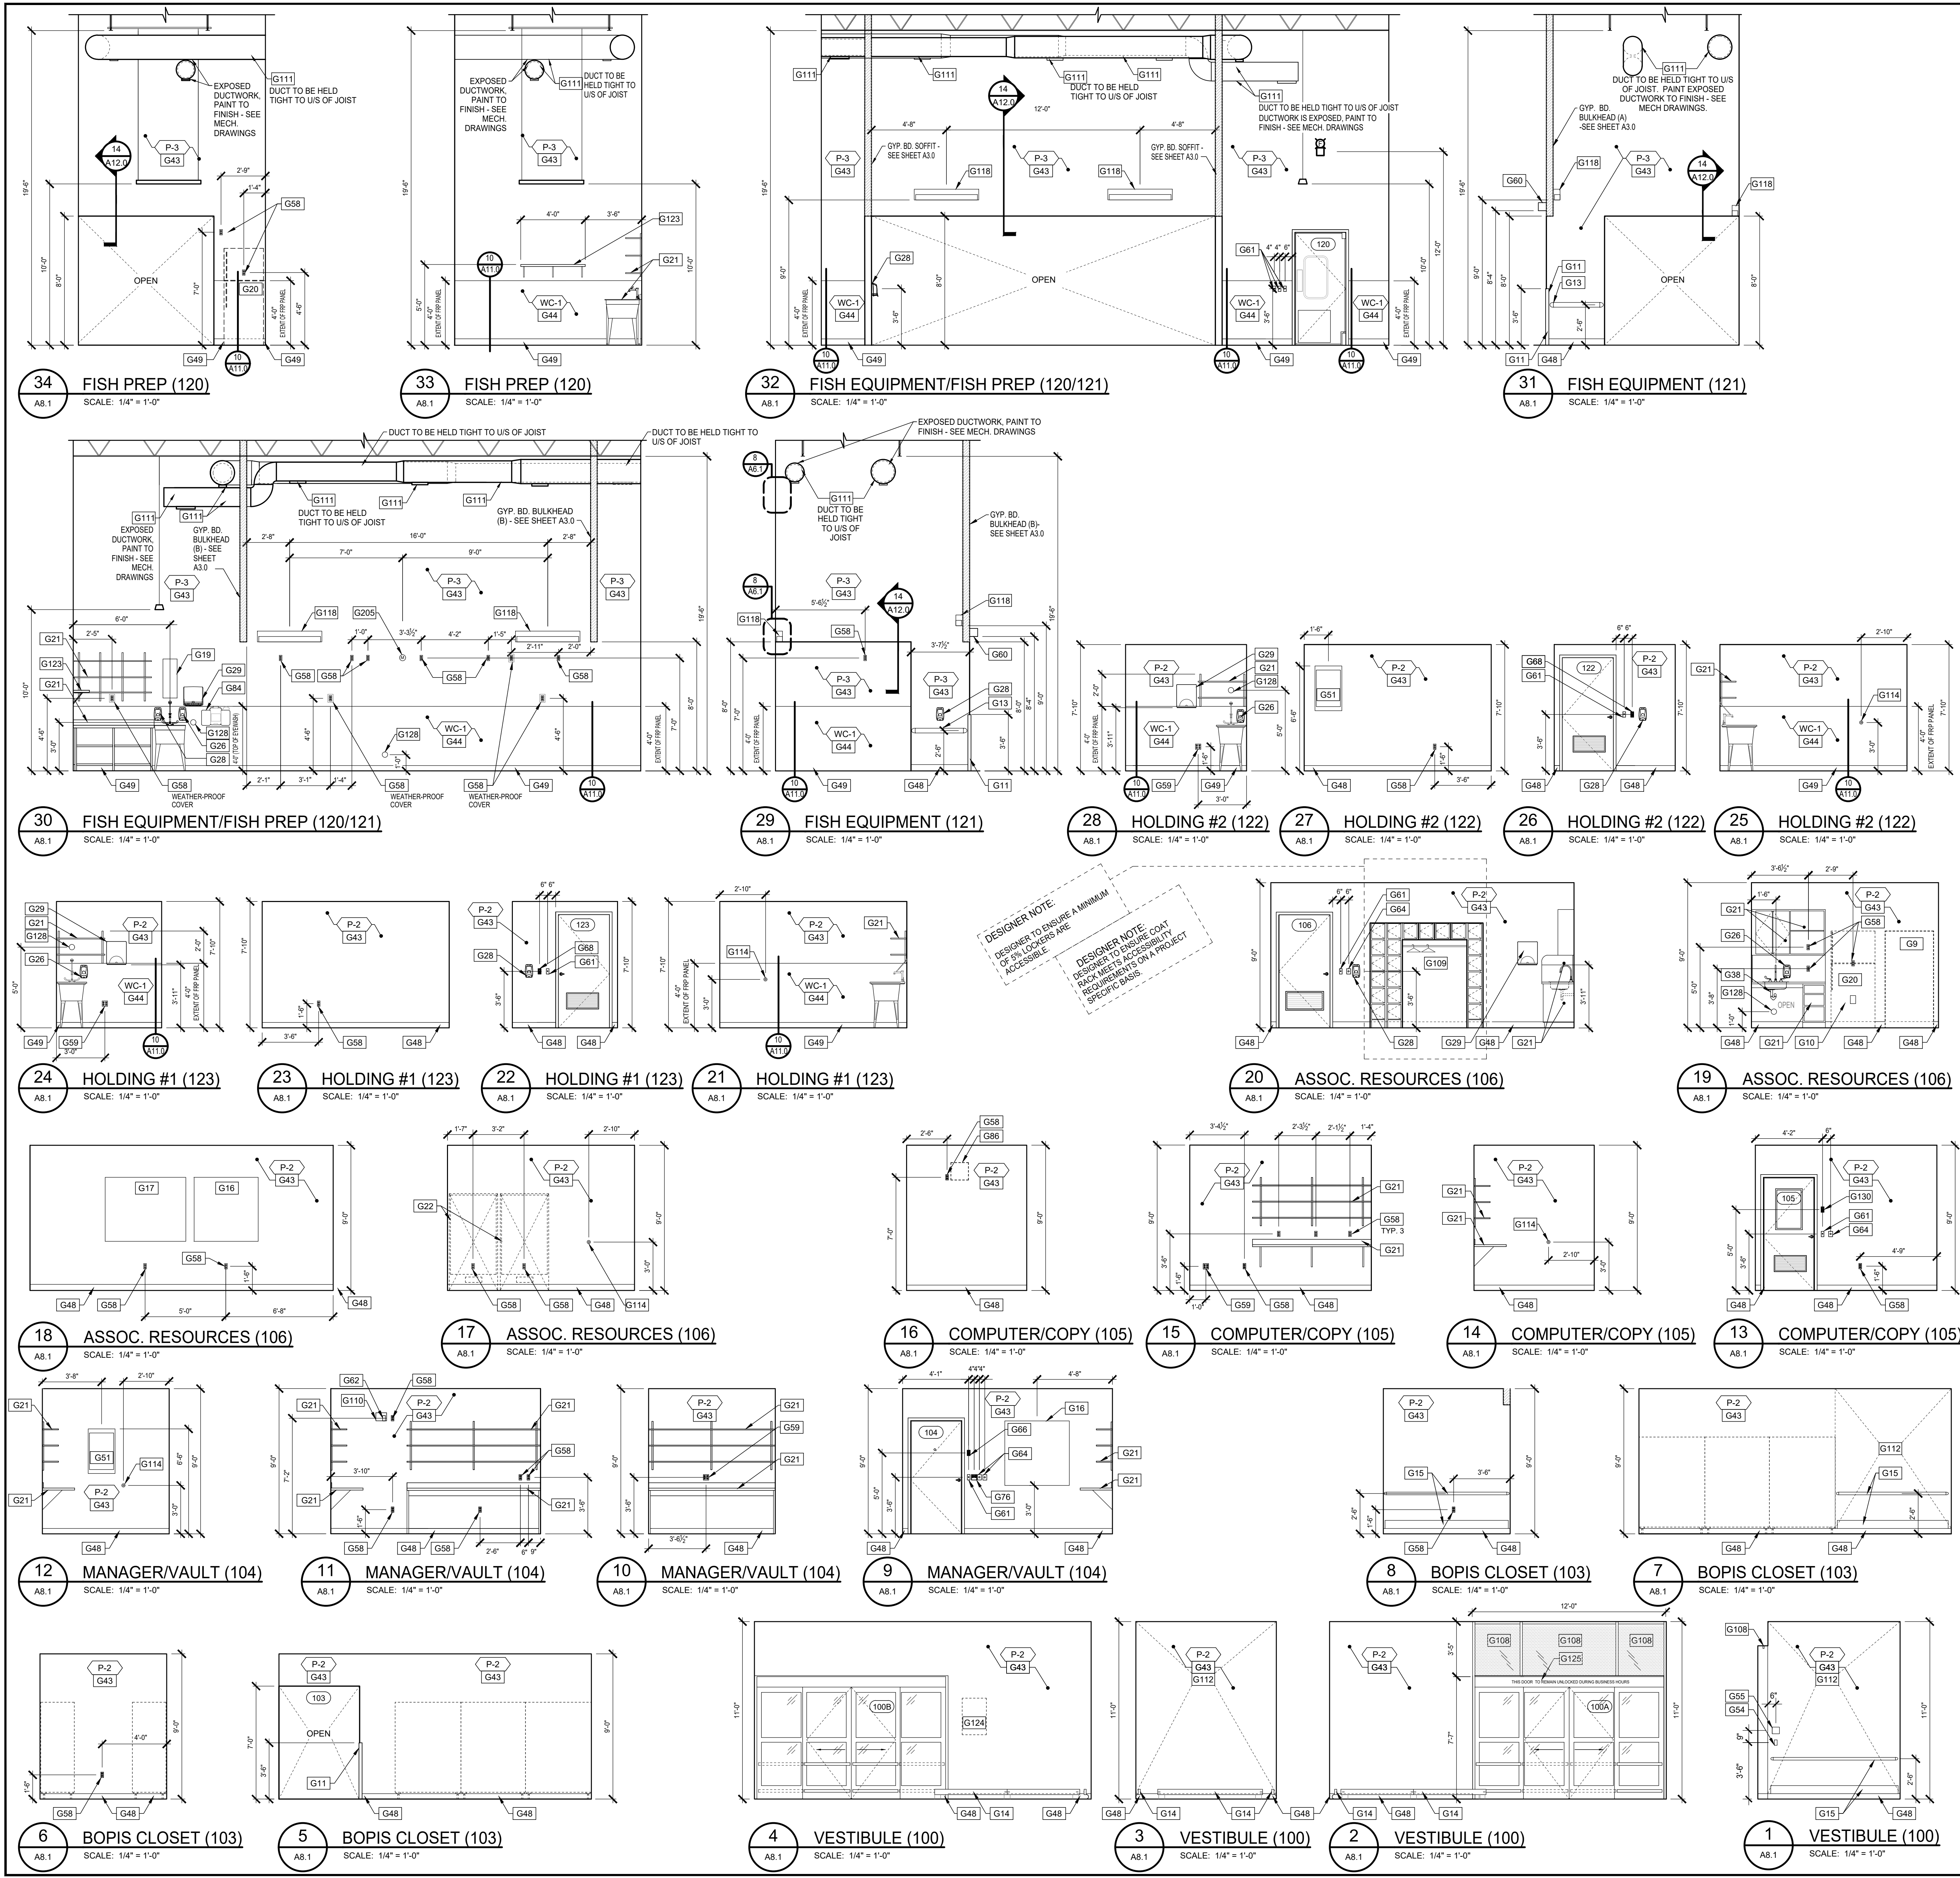

GENERAL NOTES:

1. SEE SHEET A0.1 FOR ARCHITECTURAL KEY NOTES.

FRP GENERAL NOTES:

1. MILLWORK VENDOR HIRED BY G.C. SHALL PROVIDE AND INSTALL FRP SYTEM. IT IS THE G.C. RESPONSIBILITY TO INCLUDE THEIR PRICE IN HIS BID.

2. THERE WILL BE NO EXCEPTIONS. THE AREAS THAT RECEIVE THE FRP MUST BE PROPERLY PREPPED. IF THE AREAS ARE NOT CLEAN, PROPERLY PREPARED AND PROPERLY LIGHTED CAUSING A DELAY IN INSTALLATION, THE GC WILL BE REQUIRED TO PAY MILLWORK VENDOR FOR EACH DAY LONGER THAT THE INSTALL TAKES AS WELL AS THE COST TO PREPARE THE AREAS CORRECTLY. THE COST FOR DELAY WILL BE PAID DIRECTLY TO MILLWORK VENDOR.

3. GENERAL CONTRACTORS SHALL BE RESPONSIBLE FOR PROVIDING MATERIAL TAKE-OFF FOR ORDERING OF THE FRP. TRIM AND BASE (MILLWORK VENDOR TO SUPPLY AND INSTALL).

4. TYPICAL LEAD TIME FOR FRP MATERIALS IS TO BE COORDINATED WITH MILLWORK VENDOR.

TILE INSTALLATION CRITERIA

1. EXPOSED OR SHARP EDGES ARE NOT PERMITTED. FACTORY FINISHED EDGES (NOT FIELD CUT EDGES) MAY BE EXPOSED ONLY WHERE INDICATED IN THE DRAWINGS.

2. THE LAYOUT OF THE TILE WAJNSCOT, SHOWN ON THE INTERIOR ELEVATIONS, IS TO BE LAID OUT SUCH THAT THE FIELD IS EQUAL, CENTERED, FROM END OF THE WALL TO THE OPPOSITE END UNLESS NOTED OTHERWISE. THERE WILL TYPICALLY BE CUT TILES ON BOTH ENDS AND THERE SHALL BE LESS THAN 12" OF ONE TILE USED IN THE FIELD OF THE WAJNSCOT, UNLESS SPECIFIED START POINT OR ROOM CONFIGURATION DICTATES TILE TO BE LESS THAN 1/2 OF ONE TILE.

3. IN ALL ROOMS WITH FLOOR TILE AND MATCHING WALL TILE WAJNSCOT AND TILE BASE, THE JOINTS OF THE FLOOR AND WALL TILES ARE TO ALIGN.

MISCELLANEOUS BLOCKING SCHEDULE:

ROOM NAME	ROOM NUMBER	BLOCKING FOR	MATERIAL
VESTIBULE	100	WALL BUMPER GUARDS	8" METAL STRAP (SEE DETAIL 14/A32.0)
		CRASH RAIL	12" METAL STRAP (SEE DETAIL 14/A32.0)
SALES AREA	101	WALL BUMPER GUARDS	8" METAL STRAP (SEE DETAIL 14/A32.0)
		DECOR LEDGES	3/4" X 24" PLYWOOD
		HAND SANITIZER	3/4" X 24" PLYWOOD
FRONT P.O.S.	102	DECOR LEDGE	3/4" X 24" PLYWOOD
BOBOS CLOSET	103	DOOR STOP	6005162-33 MTL. STUD
MANAGER/VAULT	104	PAPER TOWEL DISPENSER	6005162-33 MTL. STUD
ASSOCIATES RESOURCES	106	HAND SANITIZER	3/4" PLYWOOD
		DOOR STOP	3/4" PLYWOOD
HALL A	108	WALL BUMPER GUARDS	8" METAL STRAP (SEE DETAIL 14/A32.0)
		DRAWING FOUNTAINS	2X6
		S.S. SHELF	3/4" PLYWOOD
UNISEX WASHROOM	110	GRAB BARS	3/4" PLYWOOD
		TOILET PAPER DISPENSER	3/4" PLYWOOD
		TOWEL DISPENSER	3/4" PLYWOOD
		SANITARY WASTE DISPOSAL	3/4" PLYWOOD
		HAND SANITIZER	3/4" PLYWOOD
		TOILET SEAT COVER DISPENSER	3/4" PLYWOOD
		MIRROR	3/4" PLYWOOD
		GRAB BARS	3/4" PLYWOOD
		TOILET PAPER DISPENSER	3/4" PLYWOOD
		TOWEL DISPENSER	3/4" PLYWOOD
UNIVERSAL WASHROOM	111	GRAB BARS	3/4" PLYWOOD
		TOILET PAPER DISPENSER	3/4" PLYWOOD
		TOWEL DISPENSER	3/4" PLYWOOD
		HAND SANITIZER	3/4" PLYWOOD
		TOILET SEAT COVER DISPENSER	3/4" PLYWOOD
		MIRROR	3/4" PLYWOOD
		GRAB BARS	3/4" PLYWOOD
		TOILET PAPER DISPENSER	3/4" PLYWOOD
		TOWEL DISPENSER	3/4" PLYWOOD
		HAND SANITIZER	3/4" PLYWOOD
SALON	114	S.S. SHELF	3/4" PLYWOOD
		DOOR STOP	3/4" PLYWOOD
DRYING AREA	115	MASTER BLASTER DRIVERS	3/4" PLYWOOD
		HAND SANITIZER	3/4" PLYWOOD
BATHING AREA	116	SURFACE MOUNTED PIPING & FAUCETS	2 X 6
		LEASH HOLDERS	3/4" PLYWOOD (SEE INT. ELEVATIONS)
RECEIVING	117	EYEWASH	2 X 6 (SEE DETAIL 6/A6.0)
		IMPACT DOOR	2 X 6
ADDITIONS	118	CHEMICAL WASHING SYSTEM	2 X 6
		MOP HOLDER	2 X 6
ADDITIONS	119	EYEWASH	3/4" PLYWOOD
		ROOF LADDER	4X (SEE DETAIL 3/A12.0)
FISH PREP	120	HAND SANITIZER	3/4" PLYWOOD
		PAPER TOWEL DISPENSER	3/4" PLYWOOD
HOLDING ROOM #2	122	IMPACT DOOR	2 X 6 (SEE DETAIL 6/A6.0)
		CHEMICAL WASHING SYSTEM	2 X 6
HOLDING ROOM #1	123	EYEWASH	3/4" PLYWOOD
		HAND SANITIZER	3/4" PLYWOOD
HOLDING ROOM #1	123	PAPER TOWEL DISPENSER	6005162-33 MTL. STUD
		DOOR STOP	3/4" PLYWOOD

MILLWORK BLOCKING SCHEDULE:

ELEV.	ROOM	NAME	NUMBER	APPROX TOTAL FEET	MATERIAL	HEIGHT A.F.F.
9.10 & 11/A8.1	MANAGER/VAULT	104	22'-0"	2 X 6	27"	
10 & 11/A8.1	MANAGER/VAULT	104	16'-0"	3/4" X 36" PLYWD	48"	
10 & 11/A8.1	MANAGER/VAULT	104	6'-0"	3/4" X 27" PLYWD	0"	
15 & 14/A8.1	COMPUTER/COPY	105	9'-6"	2 X 6	27"	
15/A8.1	COMPUTER/COPY	105	7'-6"	3/4" X 36" PLYWD	48"	
15/8.1	COMPUTER/COPY	105	4'-0"	3/4" X 27" PLYWD	0"	
19 & 20/A8.1	ASSOCIATE RESOURCES	106	16'-0"	2 X 6	27", 54", 79"	
18 & 19/A8.1	ASSOCIATE RESOURCES	106	16'-0"	3/4" X 48" PLYWD	0"	
2 & 4/A8.2	SALON	114	60'-0"	2 X 6	36", 70-1/2"	
22/A8.3	RECEIVING	117	3'-0"	3/4" X 36" PLYWD	48"	
6 & 7/A8.3	ADDITIONS	119	7'-0"	2 X 6	27"	
6/A8.3	ADDITIONS	119	2'-0"	3/4" X 27" PLYWD	0"	
30/A8.1	FISH PREP	120	5'-0"	3/4" X 36" PLYWD	52"	
33/A8.1	FISH PREP	120	8'-6"	2 X 6	49"	
28/A8.1	HOLDING #2	122	3'-0"	3/4" X 36" PLYWD	48"	
24/A8.1	HOLDING #1	123	3'-0"	3/4" X 36" PLYWD	48"	

CONTRACTOR SHALL VERIFY MILLWORK BLOCKING LOCATIONS & EXTENT WITH NATIONAL ACCOUNT MILLWORK VENDOR

NOTE: ALL MILLWORK IS SUPPLIED AND INSTALLED BY G.C. AS PART OF G.C. SCOPE THRU NATIONAL ACCOUNT MILLWORK VENDOR (SEE SHEET F.T.0). ALL BLOCKING/BACKING IS SUPPLIED AND INSTALLED BY GENERAL CONTRACTOR.

PROJECT NO: CA0073426.0987

DATE: 05.08.26

DESIGNED BY: [Signature]

CHECKED BY: [Signature]

PAGE # 19 OF 54

DISCIPLINE: ARCHITECTURAL

INTERIOR ELEVATIONS

SHEET NUMBER: A8.1