


LIGHT FIXTURE SCHEDULE									
TYPE	MANUFAC.	CATALOG#	VOLT.	LAMP TYPE	WATTS	DESCRIPTION / REMARKS			QTY.
A4	GE	LUS-CA-A-052-V1-T-35-VQ-CS	VMVOLT	LED	37	4 1/2" WIDE X 8" HIGH X 1" LONG LED LINEAR LIGHT FIXTURE, 3500K. FIXTURE SUSPENDED AT 14'-0" A.F.F.			8
A8	GE LIGHTING	LUS-CA-A-101-V1-T-35-VQ-CS	VMVOLT	LED	73	IN SALES AREA 101. REFER TO MOUNTING DETAIL 3/E1.0. SEE NOTE 2.4.6.7.			91
A8	GE LIGHTING	LUS-C8-A-0-A0-V1-T-35-VQ-CS	VMVOLT	LED	73	4 1/2" WIDE X 8" HIGH X 8" LONG LED LINEAR LIGHT FIXTURE, 3500K. FIXTURE SUSPENDED AT 14'-0" A.F.F.			11
A8	GE LIGHTING	LUS-C8-A-0-A0-V1-T-35-VQ-CS	VMVOLT	LED	73	IN SALES AREA 101. REFER TO MOUNTING DETAIL 3/E1.0. SEE NOTE 2.4.6.7.			11
A8	GE LIGHTING	-WHITE-BC	VMVOLT	LED	73	IN SALES AREA 101. CIRCUIT SECOND LINE FOR NIGHT LIGHT FIXTURE. REFER TO DETAIL 5/E1.0.			11
BA	METALUX	22PF4235C	VMVOLT	LED	39	2'X2' LED FLAT DIFFUSED LENS LAY-IN LIGHT FIXTURE, 3500K.			49
CA	LITHONIA	WL4-40L-EZ1-LP835	VMVOLT	LED	40	4300 LUMENS			2
CB	COOPER	S122DW-C-1005D-8-30-AFO-1-UDD-WF	VMVOLT	LED	43	5" WIDE X 4" HIGH X 4" LONG LED LENSED WALL BRACKET LIGHT FIXTURE, 3500K			2
CB	COOPER	S122DW-C-1005D-8-30-AFO-1-UDD-WF	VMVOLT	LED	43	MOUNT FIXTURE AT 8'-0" AFF. UNO.			2
CB	COOPER	S122DW-C-1005D-8-30-AFO-1-UDD-WF	VMVOLT	LED	43	2.4" WIDE X 4" HIGH X 4" LONG LED LENSED WALL MOUNTED LIGHT FIXTURE, 3000K.			3
CB	COOPER	S122DW-C-1005D-8-30-AFO-1-UDD-WF	VMVOLT	LED	43	MOUNT FIXTURE AT 9'-0" AFF. UNO.			3
EM	LITHONIA	ELML6-VOLVT-LTP-SDR	VMVOLT	LED	11	EMERGENCY BATTERY UNIT WITH 2 LAMP HEADS			41
EM	LITHONIA	ELML6-VOLVT-LTP-SDR	VMVOLT	LED	11	EMERGENCY LIGHT FIXTURES IN MAIN SALES & AREAS TO ROOF DECK SHALL BE MOUNTED TO UNDERSIDE OF JOIST. EMERGENCY LIGHT FIXTURES IN AREAS WITH CEILINGS SHALL BE SURFACE MOUNTED ON CEILING. EMERGENCY LIGHT FIXTURES IN FISH PREP 120 & FISH EQUIPMENT 121 SHALL BE AT 12'-0" AFF TO BOTTOM OF UNIT. MOUNT FIXTURE TO ENSURE TEST BUTTON ON THE FIXTURE FACES AWAY FROM THE CLOSEST WALL.			124
G4	GE	LUS-IA-A-052-V1-T-35-VQ-CS	VMVOLT	LED	37	4 1/2" WIDE X 8" HIGH X 4" LONG LED LINEAR LIGHT FIXTURE, 3500K			24
G4	GE LIGHTING	-WHITE	VMVOLT	LED	37	IN RECEIVING 117 MOUNT LIGHTS IN BETWEEN JOISTS, ABOVE BOTTOM CHORD OF BAR JOISTS.			124
L	LUMARK	XTOR6BRL	VMVOLT	LED	58	IN FISH PREP. 120 MOUNT LIGHT AT 10'-0" AFF.			14
L	LUMARK	XTOR6BRL	VMVOLT	LED	58	LED WALL MOUNT LIGHT AT 14'-0" A.F.F. TO CENTERLINE OF FIXTURE UNLESS NOTED OTHERWISE.			14
L	LUMARK	XTOR6BRL	VMVOLT	LED	58	DARK BRONZE FINISH.			14
L	LUMARK	XTOR6BRL	VMVOLT	LED	58	SEE FLOOR PLAN FOR ADDITIONAL INFORMATION.			14
M	GE	LRC-6R-0-15NR-SD-LC-MR-35-Q	VMVOLT	LED	19	6" LED OPEN DOWN LIGHT WITH GE #93025091 - FRAMER KIT.			3
S	GE LIGHTING	LQM-S-W-RM-VOLVT-EL-HO	VMVOLT	LED	1	UL LISTED FOR DAMP LOCATIONS			3
S	LITHONIA	LQM-S-W-RM-VOLVT-EL-HO	VMVOLT	LED	1	EXIT SIGN, RED LETTERED WITH BATTERY PACK. SEE DETAIL 4/E1.0. PENDANT MOUNTED EXIT SIGN(S) IN MAIN SALES AND/OR AREAS OPEN TO ROOF DECK. SHALL BE AT 12'-0" AFF TO BOTTOM OF SIGN.			3
W	LITHONIA	ELML6-VOLVT-LTP-SDR-T2-LH	VMVOLT	LED	1	EMERGENCY BATTERY UNIT W/IO LAMP HEADS TO PROVIDE BATTERY POWER FOR EXTERIOR REMOTE HEADS.			3
W	LITHONIA	ELMRW-SP640L-DWHDX-T2	VMVOLT	LED	1	REMOATE LAMP HEADS FOR EXTERIOR EMERGENCY LIGHTING. CONTRACTOR SHALL PROVIDE MAINTENANCE RECOMMENDED WIRE SIZE BETWEEN BATTERY PACK AND REMOTE HEADS FOR VOLTAGE DROP.			3
W	LITHONIA	ELMRW-SP640L-DWHDX-T2	VMVOLT	LED	1	MOUNT 1'-0" ABOVE DOOR HEADER UNLESS NOTED OTHERWISE.			3
1.	CONTRACTOR SHALL CONTACT LIGHTING DISTRIBUTOR FOR ORDERING INFORMATION. THIS IS A REQUIRED VENDOR. SEE REQUIRED VENDOR LIST ON P.20								
2.	SEE PLAN FOR LENGTH AND QUANTITY OF LINEAR FIXTURES PER ROW FOR TYPES 'A4', 'A8' AND 'A8N'. (37 WATTS PER 4 FOOT LENGTH)								
3.	ELECTRICAL CONTRACTOR TO VERIFY ALL QUANTITIES OF LIGHT FIXTURES PRIOR TO ORDERING FIXTURES.								
4.	FURNISH FIXTURE WITH ALL NECESSARY STARTER KITS, JOINERS, CONNECTIONS, ENDCAPS, ETC. FOR A COMPLETE AND CONTINUOUS FIXTURE LENGTH RUN.								
5.	ALL LIGHT FIXTURES IN THIS SCHEDULE MAY NOT BE APPLICABLE TO THIS PROJECT.								
6.	LIGHT FIXTURES TO BE SUPPLIED WITH 2" MOUNTING CABLES, POWER FEED CABLE, AND MOUNTING BRACKETS WITH SUSPENSION KIT.								
7.	GE STARTER KIT (10 ROW) #93046698-WH FOR CONTINUOUS ROW FIXTURES. PROVIDE (1) STARTER KIT PER CONTINUOUS ROW.								

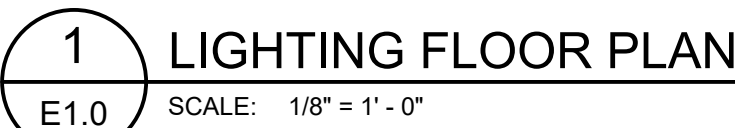

- IMPLIES WITH
AND ADD
REQUIRED.